

Product Finish: Chrome

Product code: AT1055  
EAN13 barcode: 5060048380545




## Product features:

- Metal construction throughout
- Solid and functional European architect design styling
- Single lever control for effortless single handed control
- Antisplash spout supplied as standard
- Supplied complete with flexible tail pipes for fast simple fitting

## Additional information / Parts included:

2.5mm a/f Allen key included

## Product dimensions:

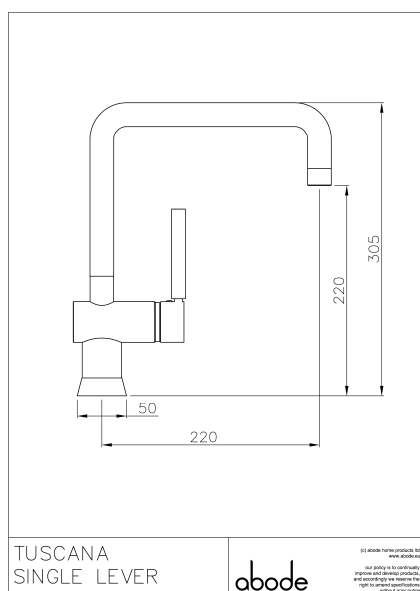

- Overall Height / projection: 305 mm
- Exit reach: 220 mm
- Exit height: 220 mm
- Centre distance(s): 220 mm


- Base diameter(s): 50 mm
- Recommended hole diameter: Ø 35 mm
- Max. surface depth: 50 mm

- Spout diameter: 24 mm
- Spout aerator size: 22f

## Packaged properties:

<b>Box length:</b> 420mm	<b>Box depth:</b> 75mm
<b>Box width:</b> 240mm	<b>Units per outer:</b> 5
<b>Tap only weight:</b> 1.52kg	<b>Boxed weight:</b> 2.13kg

## Product flow characteristics:

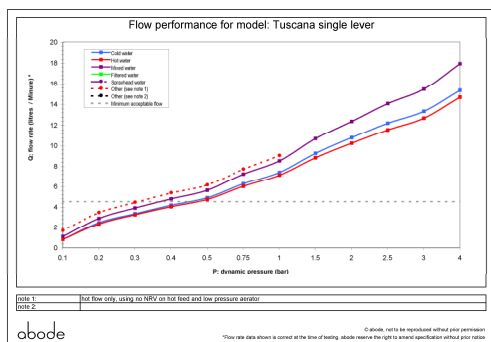

- Min / Max water pressure: 0.50 / 5.5 bar
- Recommended / Max water temperature: 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min): 14.82

- Control valve type: Single lever ceramic cartridge
- Product flow characteristics: Single flow
- Non return valve(s): Hot & cold (integral to tails)

- Aerator type: Metal fine mesh diffuser & flow straightener
- Accepts revolve / spray areator: Yes
- Spout connection method: One way snap fit

- Tail pipe inlet / outlet size: M10 / 1/2" BSP Male
- Inlet pipe type / length: flexible stainless braided hose / 270 mm

## Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt.
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

## Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year