

Product Finish: Stainless steel

Product code: AT1104  
EAN13 barcode: 5060048380842




## Product features:

- 304 grade brushed stainless steel construction
- Single lever control for effortless single handed control
- Solid and functional European architect design styling
- Antisplash spout supplied as standard
- Supplied complete with flexible tail pipes for fast simple fitting

## Additional information / Parts included:

## Product dimensions:

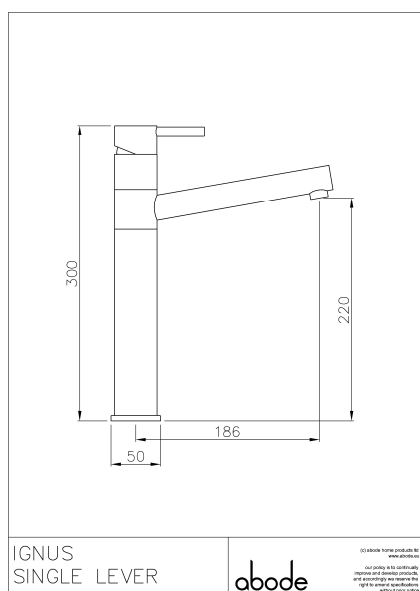

- **Overall Height / projection:** 300 mm
- **Exit reach:** 186 mm
- **Exit height:** 220 mm
- **Centre distance(s):**

- **Base diameter(s):** 50 mm
- **Recommended hole diameter:** Ø 35 mm
- **Max. surface depth:** 40 mm

- **Spout diameter:** 25 mm
- **Spout aerator size:** 18m

## Packaged properties:

**Box length:** 420mm

**Box depth:** 75mm


**Box width:** 240mm

**Units per outer:** 5

**Tap only weight:** 1.35kg

**Boxed weight:** 2.12kg

## Product flow characteristics:

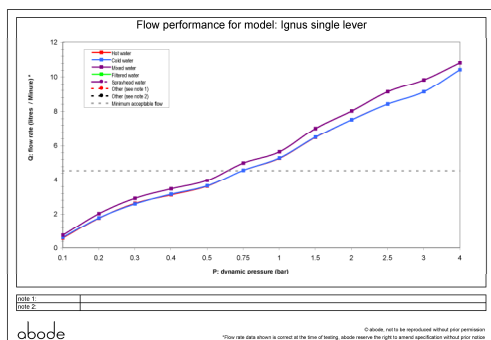

- **Min / Max water pressure:** 0.50 / 5.5 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 09.80

- **Control valve type:** Single lever ceramic cartridge
- **Product flow characteristics:** Single flow
- **Non return valve(s):** Hot & cold (separate)

- **Aerator type:** Metal fine mesh diffuser
- **Accepts revolve / spray areator:** No
- **Spout connection method:** N/a

- **Tail pipe inlet / outlet size:** M10 / 1/2" BSP Female
- **Inlet pipe type / length:** flexible stainless braided hose / 400 mm

## Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt.
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

## Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year