

Product Finish: Chrome

Product code: AT1153
EAN13 barcode: 5060048381689




Product features:

- Metal construction throughout
- Innovative push & pull lateral valve design
- Crisp modernist design lines
- Polished stainless steel spring
- Extending spout end for ease of use (non spray)

Additional information / Parts included:

2.0mm & 1.5mm a/f Allen key, blue neoperl aerator key included

Product dimensions:

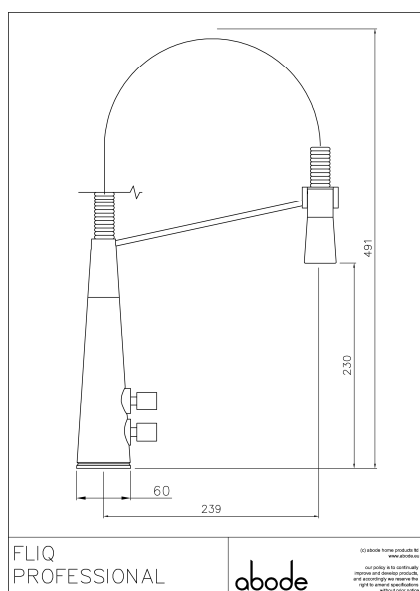

- Overall Height / projection: 491 mm
- Exit reach: 239 mm
- Exit height: 230 mm
- Centre distance(s):


- Base diameter(s): 60 mm
- Recommended hole diameter: Ø 35 mm
- Max. surface depth: 70 mm

- Spout diameter: 22 mm
- Spout aerator size: 24mm

Packaged properties:

Box length: 575mm	Box depth: 75mm
Box width: 355mm	Units per outer: 5
Tap only weight: 2.82kg	Boxed weight: 3.78kg

Product flow characteristics:

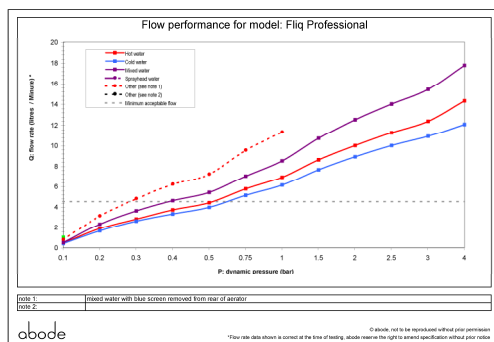

- Min / Max water pressure: 0.50 / 5.5 bar
- Recommended / Max water temperature: 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min): 15.40

- Control valve type: Ceramic disc - slide operation
- Product flow characteristics: Single flow
- Non return valve(s): Hot & cold (integral to tails), 1 x in spout head

- Aerator type: Plastic mesh diffuser
- Accepts revolve / spray areator: No
- Spout connection method: Grub screw

- Tail pipe inlet / outlet size: M12 / 1/2" BSP Male
- Inlet pipe type / length: flexible stainless braided hose / 270 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt.
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year