



**Product features:**

- Metal construction throughout
- Custom designed for lower range pressures
- Thermostatic valve for safety & comfort
- Freshly designed contemporary blend
- Supplied with adjustable centre inlets


**Packaged properties:**

**Box length:** 380 mm      **Box depth:** 75 mm  
**Box width:** 175 mm      **Boxed weight:** 2.53 kg

**Includes pop up waste?:** No


**Additional comments:**

**Product dimensions:**

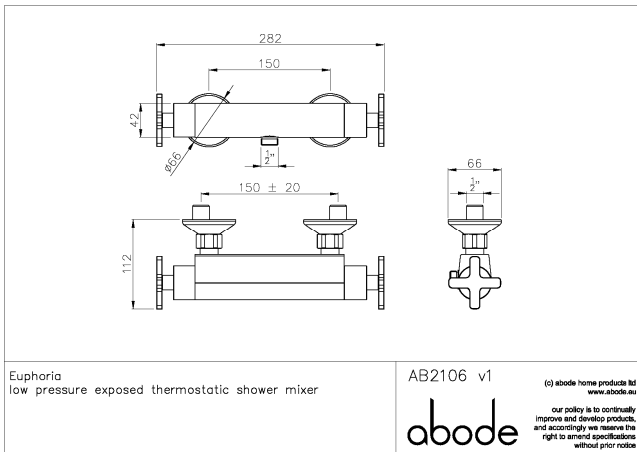

- **Overall Height / projection:** 112 mm
- **Exit reach:**
- **Exit height:**
- **Centre distance(s):** 150 ± 20 mm
- **Base diameter(s):** 66 mm
- **Product mounted where:** Wall
- **Recommended hole diameter:**
- **Min. fitting depth required:** 60 mm
- **Max. surface depth:**

**Product flow characteristics:**

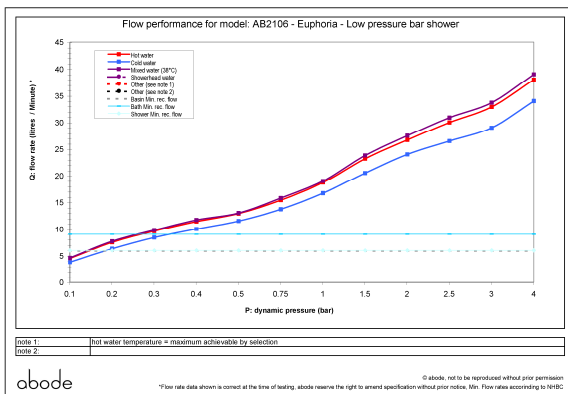

- **Min / Max water pressure:** 0.2 / 5 bar
- **Part G mixed flow rate at 3 bar (l/m):** 33.7

- **Max water temperature:** 70° C
- **Product flow characteristics:**
- **Aerator type:**
- **Includes output diverter?:** No
- **Control valve type:** Thermostatic ( )
- **Non return valve position:** h&c inlet
- **Mesh particle filter size:** 0.60 mm
- **Inlet / outlet size:** 1/2" M /
- **Inlet type / length:** Eccentric / 50 mm
- **Shower hose type / length:**

**Warranty Summary (Full details available on request):**

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

**Care instructions:**

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives