



Product features:

- Metal construction throughout
- Quarter turn handle action for precise flow control
- Custom designed for lower range pressures
- Fixed spout to prevent accidental water damage
- Adjustable to suit various thickness of wall

Packaged properties:


Box length: 395 mm **Box depth:** 95 mm
Box width: 165 mm **Boxed weight:** 2.72 kg

Includes pop up waste?: No

Additional comments:


Includes mounting screws

Product dimensions:

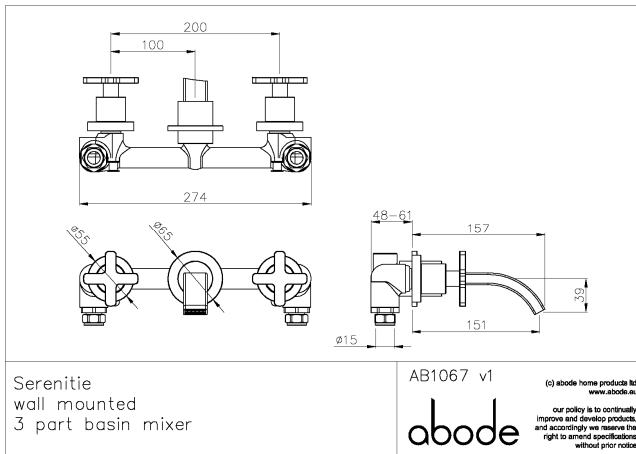

- **Overall Height / projection:** 157 mm
- **Exit reach:** 151 mm
- **Exit height:** 39 mm
- **Centre distance(s):** 100 mm
- **Base diameter(s):** 55, 65, 55 mm
- **Product mounted where:** Wall
- **Recommended hole diameter:** 35, 42, 35 mm
- **Min. fitting depth required:** 50 - 57 mm
- **Max. surface depth:**

Product flow characteristics:

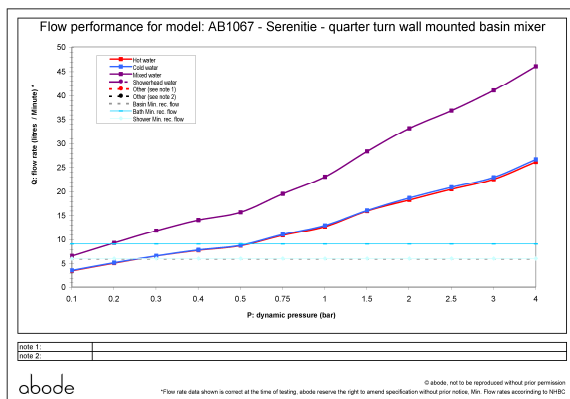

- **Min / Max water pressure:** 0.2 / 5 bar
- **Part G mixed flow rate at 3 bar (l/m):** 41
- **Max water temperature:** 70° C
- **Product flow characteristics:** Single flow
- **Aerator type:** Grey flow straightener
- **Includes output diverter?:** No
- **Control valve type:** 1/2" QT CD (8-24 extended)
- **Non return valve position:**
- **Mesh particle filter size:**
- **Inlet / outlet size:** 1/2" M /
- **Inlet type / length:** Fixed / mm
- **Shower hose type / length:**

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives