



Product features:

- Metal construction throughout
- Custom designed for lower range pressures
- Single lever control for effortless single handed control
- Supplied compete with flexible tail pipes for fast simple fitting
- A modern design classic style



- Overall Height / projection: 121 mm
- Exit reach: 133 mm
- Exit height: 73 mm
- Centre distance(s): N/A mm
- Base diameter(s): 54 x 61 mm
- Product mounted where: Surface
- Recommended hole diameter: 35 mm
- Min. fitting depth required: n/a mm
- Max. surface depth: 45 mm

Product flow characteristics:

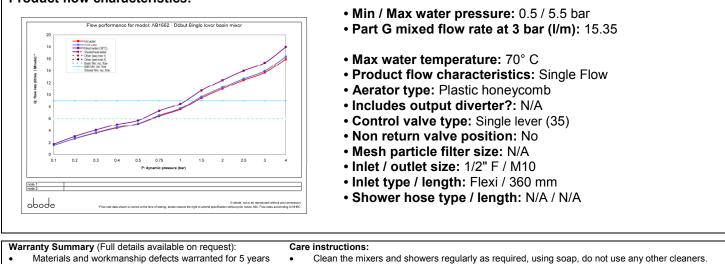

- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year .
- After cleaning rinse thoroughly with clean water to remove any cleaner residue Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Regular cleaning will prevent the build up of lime scale and dirt