

**Product features:**

- Metal construction throughout
- Thermostatic valve for safety & comfort
- Supplied complete with flexible tail pipes for fast simple fitting
- Part G compliant for thermostatic bath fillers
- Factory set maximum output temperature 46°C (adjustable)

Packaged properties:

Box length: 440 mm


Box depth: 395 mm

Box width: 255 mm

Boxed weight: 6.55 kg


Includes pop up waste?: No

Additional comments:

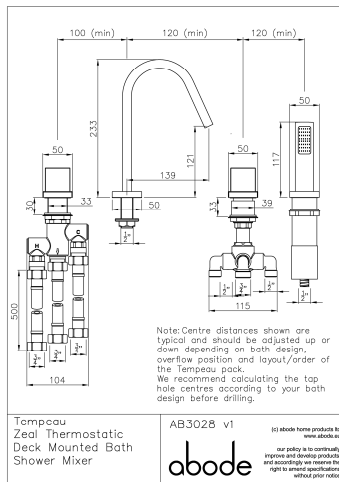Product dimensions:

- **Overall Height / projection:** 233 mm
- **Exit reach:** 161 mm
- **Exit height:** 107 mm
- **Centre distance(s):** 100, 120, 120 mm
- **Base diameter(s):** 60, 60, 60, 60 mm
- **Product mounted where:** Deck
- **Recommended hole diameter:** 34-40 mm
- **Min. fitting depth required:** n/a mm
- **Max. surface depth:** 30 mm

Product flow characteristics:

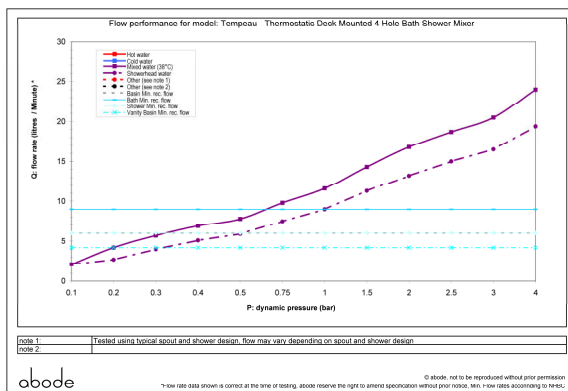

- **Min / Max water pressure:** 0.6 / 5.5 bar
- **Part G mixed flow rate at 3 bar (l/m):** 20.5
- **Max water temperature:** 70° C
- **Product flow characteristics:** Single Flow
- **Aerator type:** Flow Straightener
- **Includes output diverter?:** Yes
- **Control valve type:** Thermostatic & 180° Divertor ()
- **Non return valve position:** H&C Inlet
- **Mesh particle filter size:** 0.60 mm
- **Inlet / outlet size:** 1/2" M & 3/4" M / 1/2" M & 3/4" M
- **Inlet type / length:** Flexi / 500 mm
- **Shower hose type / length:** Metal linked / 2.00 m

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using. avoid contact with any abrasives