

Product Finish: Stainless steel

Product code: AT1262
EAN13 barcode: 5060344153706



Product features:


- 304 grade brushed stainless steel construction
- Supplied complete with flexible tail pipes for fast simple fitting
- Single lever control for effortless single handed control
- Antisplash spout supplied as standard
- Can be installed in any standard 35mm tap hole

Additional information / Parts included:

Includes cache key

Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

Product dimensions:

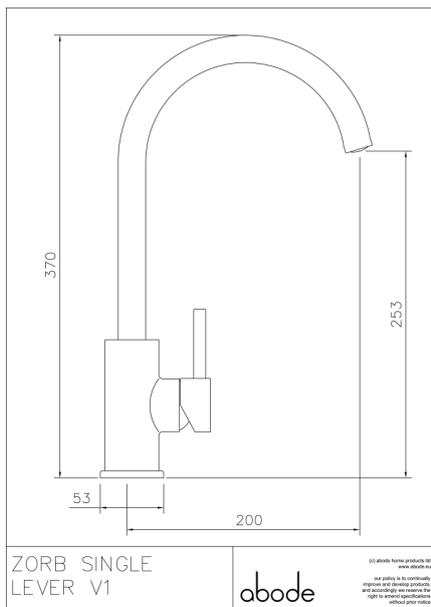

- **Overall Height / projection:** 370 mm
- **Exit reach:** 200 mm
- **Exit height:** 253 mm
- **Centre distance(s):**


- **Base diameter(s):** 53 mm
- **Recommended hole diameter:** Ø 35 mm
- **Max. surface depth:** 40 mm

- **Spout diameter:** 23 mm
- **Spout aerator size:** 18f

Packaged properties:

- Box length:** 385mm **Box depth:** 80mm
- Box width:** 240mm **Units per outer:** 5
- Tap only weight:** 1.50kg **Boxed weight:** 2.40kg

Product flow characteristics:

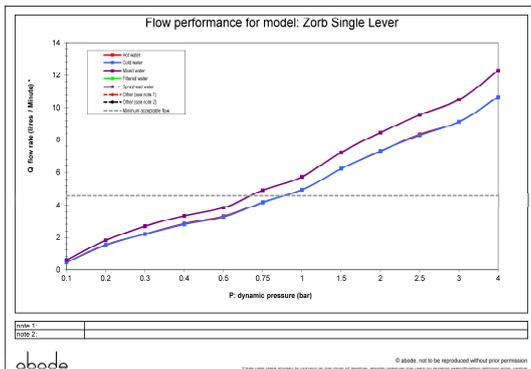

- **Min / Max water pressure:** 0.75 / 5.5 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 10.49

- **Control valve type:** 35mm single lever ceramic cartridge
- **Product flow characteristics:** Single flow
- **Non return valve(s):** Hot & cold (separate)

- **Aerator type:** Cache honeycomb
- **Accepts revolve / spray areator:** No
- **Spout connection method:** Grub screw

- **Tail pipe inlet / outlet size:** M10 / 1/2" BSP Male
- **Inlet pipe type / length:** flexible stainless braided hose / 450 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year