

Product Finish: Chrome

Product code: AT1253
EAN13 barcode: 5060344153614



Note: the image shown may not reflect the product finish, chrome finish is typically depicted.


Product features:

- Metal construction throughout
- Single lever control for effortless single handed control
- Supplied complete with flexible tail pipes for fast simple fitting
- Subtle soft sweeping design form
- Can be installed in any standard 35mm tap hole

Additional information / Parts included:

(Sco06083)

Product dimensions:

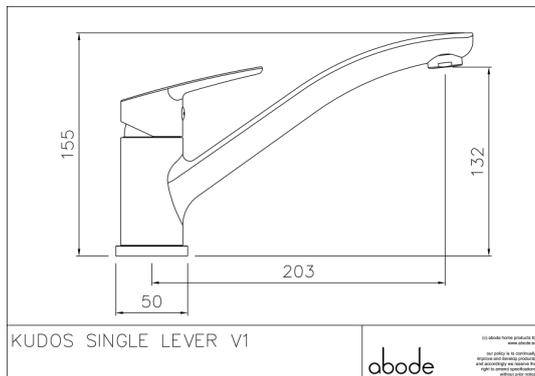

- **Overall Height / projection:** 155 mm
- **Exit reach:** 203 mm
- **Exit height:** 132 mm
- **Centre distance(s):**


- **Base diameter(s):** 50 mm
- **Recommended hole diameter:** Ø 35 mm
- **Max. surface depth:** 50 mm

- **Spout diameter:** n/a mm
- **Spout aerator size:** 24mm

Packaged properties:

- | | |
|--------------------------------|-----------------------------|
| Box length: 355mm | Box depth: 57mm |
| Box width: 140mm | Units per outer: 10 |
| Tap only weight: 1.46kg | Boxed weight: 1.02kg |

Product flow characteristics:

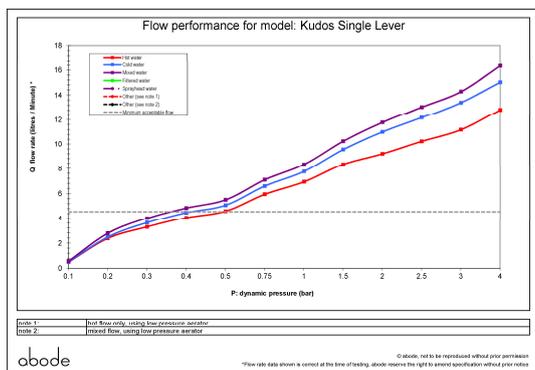

- **Min / Max water pressure:** 0.40 / 5.5 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 14.28

- **Control valve type:** Single lever ceramic cartridge
- **Product flow characteristics:** Single flow
- **Non return valve(s):** Hot & cold (integral to tails)

- **Aerator type:** Honeycomb aerator
- **Accepts revolve / spray areator:** Yes
- **Spout connection method:** Fixed

- **Tail pipe inlet / outlet size:** M10 / 1/2" BSP Male
- **Inlet pipe type / length:** flexible stainless braided hose / 250 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year