NeoTank™ – International Model: NXT





# NeoTank™ - International Model: NXT

Stainless Steel Tank dispenses filtered near-boiling water instantly.

#### **Features**

- 2.5 litre stainless steel tank
- Touch screen electronic temperature control from 88°C - 98°C
- Maintains the precise temperature setting  $\pm 0.5^{\circ}\text{C}$
- Tool-free tank connections and dry start protection to ease installation

- 220–240 volts, 1300 watts, 5.7 amps
- Easy to install
- For use with InSinkErator instant hotwater taps, integrated faucets and filtration systems
- 2 year tap and tank guarntee






# PRODUCT SPEC SHEET

NeoTank™ -International Model: NXT

### **Specifications**

- Capacity: 2.5 Litre Stainless Steel Tank
- Electrical 220-240 volts, 1300 watts, 5.7 amps
- Thermostat Electronic adjustable from 88°C to 98°C (factory pre-set at 96°C)
- Insulation Meets U.L.
   94HF.1 flammability
   specification
- Supply pressure 1-8 bar
- Shipping weight Approximately 2.7 kg
   Tank, 4.7 kg w/filtration
   system

#### Dimensions (mm)

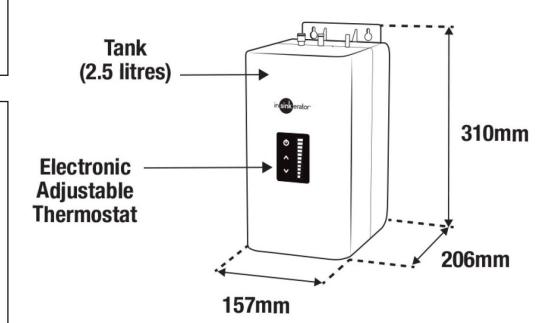

InSinkErator Suite 10, Building 6 Hatters Lane Croxley Green Business Park Watford, Herts WD18 8YH United Kingdom

Sales tel: 01923 297 880 Service tel: 0800 389 3715 www.insinkeratorsc.co.uk InSinkErator Emerson Electric Co. 4700 21st Street Racine, WI 53406-5093 USA

Sales/Service tel: +1 262-554-5432 www.insinkerator.com/worldmap.html





