

Product features:

- Metal construction throughout
- Quarter turn handle action for precise flow control
- Custom designed for lower range pressures
- Freshly designed contemporary blend
- Swivel spout for maximum flexibility

Packaged properties:

Box length (mm): 380


Box depth(mm): 105

Box width(mm): 255

Boxed weight (Kg): 3.1


Includes pop up waste?: No

Additional comments:

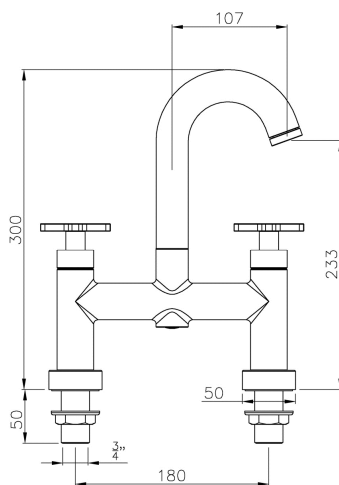Product dimensions:

- | | |
|---------------------------------------|---------|
| • Product mounted where: | Surface |
| • Recommended hole size: | 32 mm |
|
 | |
| • Overall Height / projection: | 300 mm |
| • Exit reach: | 107 mm |
| • Exit height: | 223 mm |
| • Base size: | 50 mm |
|
 | |
| • Inlet centre distance(s): | 180 mm |
|
 | |
| • Min. fitting depth required: | N/A mm |
| • Max. surface depth: | 35 mm |

Product flow characteristics:

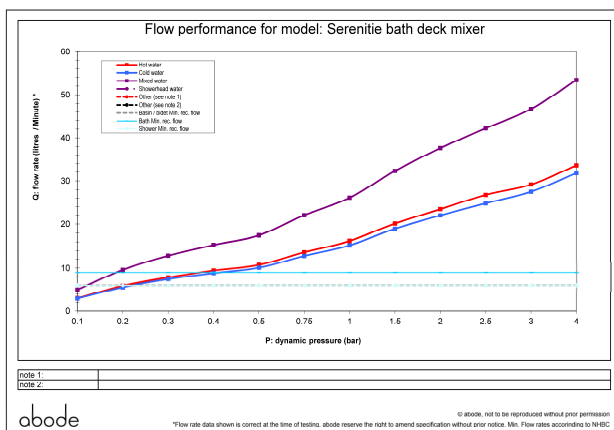

- **Min / Max water pressure (bar):** 0.20* / 5.00
- **Part G max. mixed flow rate at 3 bar (l/m):** 18.86
- **Inlet connection type / length:** Fixed / 65 mm
- **Inlet (plumbing connection) / outlet size:** 3/4" M /
- **Product flow characteristics:** Single flow
- **Non return valve(s) supplied or position:** N/A
- **Aerator type:** White flow straightener
- **Control valve type:** 1/2" QT CD (8-20)
- **Includes output diverter?:** No
- **Inlet meshed particle filters included:** N/A
- **Shower hose type / length:** N/A / N/A

Warranty Summary (full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using. avoid contact with any abrasives