

Product features:

- Metal construction throughout
- Quarter turn handle action for precise flow control
- Custom designed for lower range pressures
- Fixed spout to prevent accidental water damage
- Adjustable to suit various thickness of wall

Packaged properties:


Box length (mm): 395 Box depth(mm): 95
Box width(mm): 165 Boxed weight (Kg): 2.8

Includes pop up waste?: No

Additional comments:


Includes mounting screws

Product dimensions:

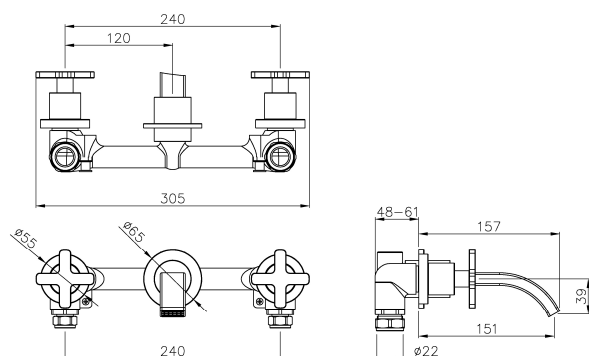

- Product mounted where: Wall
- Recommended hole size: 35, 42, 35 mm
- Overall Height / projection: 157 mm
- Exit reach: 151 mm
- Exit height: 39 mm
- Base size: 55, 65, 55 mm
- Inlet centre distance(s): 240 mm
- Min. fitting depth required: 48-61 mm
- Max. surface depth: N/A mm

Product flow characteristics:

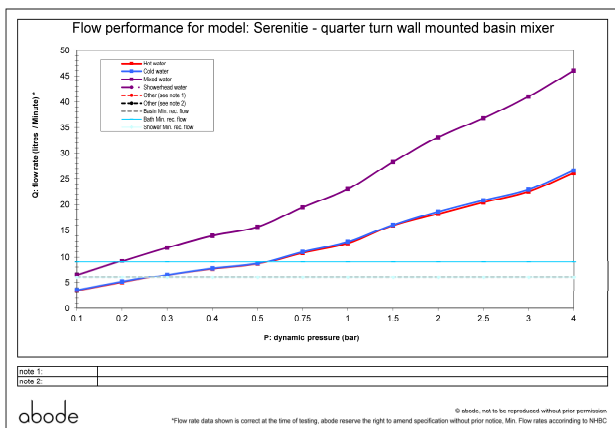

- Min / Max water pressure (bar): 0.10* / 5.00
- Part G max. mixed flow rate at 3 bar (l/m): 41
- Inlet connection type / length: Fixed / mm
- Inlet (plumbing connection) / outlet size: 1/2" M /
- Product flow characteristics: Single flow
- Non return valve(s) supplied or position: N/A
- Aerator type: Grey flow straightener
- Control valve type: 3/4" QT CD (8-24 extended)
- Includes output diverter?: No
- Inlet meshed particle filters included: N/A
- Shower hose type / length: N/A / N/A

Warranty Summary (full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives