

# abode


## Londa 1.0 Bowl & drainer



### Product dimensions and installation information: note: 💀 symbol indicates position of acoustic pad on stainless products.

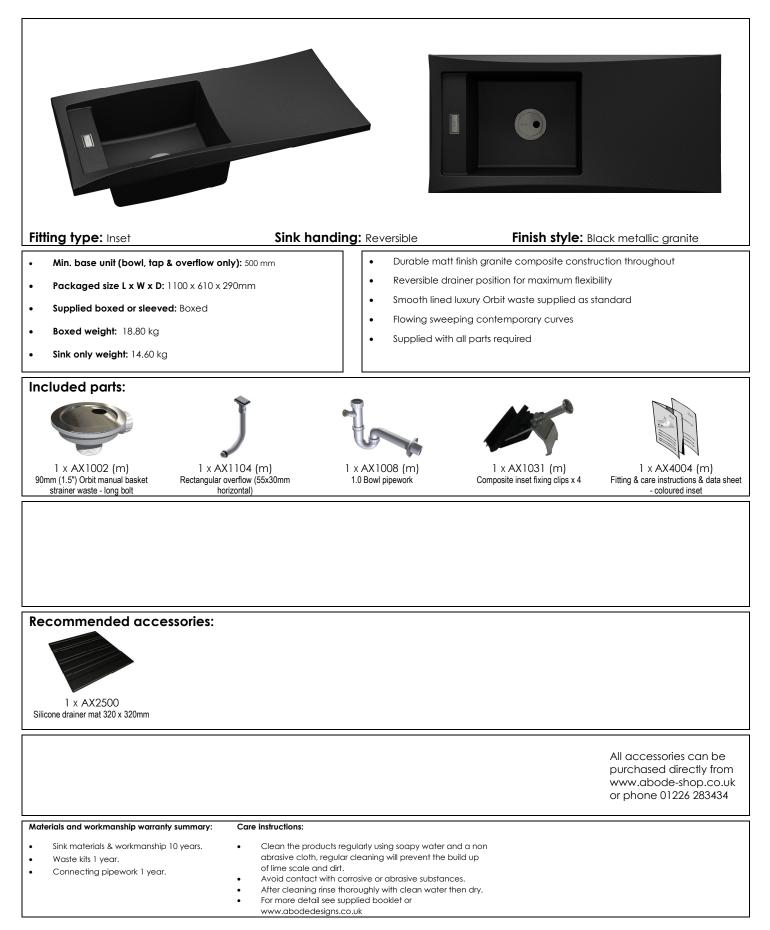

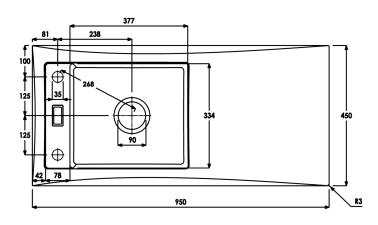



Adittional notes: Repeated release of boiling hot water directly into coloured sinks can in extreme cases cause crazing and even cracking. Therefore we recommend great care is taken not to release the water directly on to the sink surface at full temperature.

Overall product size: 950 x 450 x 225 corner radius 3mm

Taphole(s) detail: 2 x Ø 35m, Part drilled for drill guide

Compatability with large square taps:

Wastehole(s) detail (mm): 90 / N/A / N/A (nb. 90mm wastes accept a waste disposal unit)

Min. base unit (refers to space required for bowl, tap and overflow only): fits 500mm carcass

Min. Recessed fitting width: required (bowl(s), tap and overflow: 447mm

\*Worktop cut out size: 921x421 corner radius 10mm, for .DXF cut files please see www.abode.eu Min. & Max worktop depth or clip depth reach range: 32 - 50mm

Fitting temple supplied? No, use cut out instructions as supplied

Dishwasher under drainer? Distance from top of worktop to underside of the drainer 18mm

#### Bowl details: (sizes in mm unless specified otherwise) Bowl 1 (typically main bowl): Bowl 2 (typically $\frac{1}{2}$ or $\frac{3}{4}$ bowl): Bowl 1 size L x W x D (mm): 377 x 334 x 170 Bowl 1 construction: Moulded, 10.00mm Bowl 2 construction: N/A, N/Amm Bowl 2 floor radius (mm): N/A

Bowl 1 floor radius (mm): 15 Bowl 1 Wastehole diameter (mm): 90 Bowl 1 overflow: n/a Bowl 1 texture: Matt textured Bowl 1 apx. volume (litres): 19.30


Bowl 2 size L x W x D (mm): N/A x N/A x N/A Bowl 2 Wastehole diameter (mm): N/A Bowl 2 overflow: N/A Bowl 2 texture: N/A Bowl 2 apx. volume (litres): N/A

#### Bowl 3:

Bowl 3 size L x W x D (mm): N/A x N/A x N/A Bowl 3 construction: N/A, N/Amm Bowl 3 floor radius (mm): N/A Bowl 3 Wastehole diameter (mm): N/A Bowl 3 overflow: N/A Bowl 3 texture: N/A Bowl 3 apx. volume (litres): N/A

\*Important, fabricator / installer notes for undermount & flushmount sinks:

The cut out size indicated is aligned with outside edge of the bowl top radius (see example below).



You should confirm with your client if the worksurface cutout is to be cut flush, inside or outside this suggested perimeter shape & size.

If you create the cutout smaller or larger than the indicated size then the fit of the accessories may be affected and should be physically checked.

#### General:

All details are provided in good faith but do not include the tolerances of the material or manufacturing process.

We request that a test cutout is made in scrap timber and checked against the actual sink to be installed before committing to cutting the final worksurface.

Abode can not accept liability for problems or costs incurred by failure to follow this request.

Note: the dimensions on ceramic fireclay products are subject to wider tolerances due to the nature of this natural material and the firing process.

CAD cutout files can be downloaded from www.abodedesigns.co.uk

Product order code: (AW3151)