

TFP3000

Commercial Shower Range

Shower Panel with VR Head



Specification

Main Construction Material:	Steel
No of Controls:	1
Shower Type:	Shower Panel
Shower Head Type:	Fixed Head
Valve/Cartridge Type:	Thermostatic Valve
Maximum Hot Water Supply Temperature °C:	85
Maximum Static Pressure: (bar)	10
Working Pressure Range:	Min. 0.5 Bar, Max. 5.0 Bar
Connection Inlet:	15mm
Isolation Valve Included:	Yes
Check Valve Included:	Yes

Features:

- Integral thermostatic valve reduces deadleg and risk of legionella
- Single sequential control for both temperature and flow
- Vandal resistant showerhead with adjustable spray trajectory
- Fits to ceiling, leaving no exposed pipework
- Automatic thermostatic shutoff in the event of hot or cold water failure

Product Certifications:



WRAS Certificate Number: 1605045

WRAS Expiry Date: 31/05/2021




TMV Certificate Number: BC 1577/1015

TMV Expiry Date: 01/10/2020


Designations: High Pressure Shower Economy
Low Pressure Shower Economy



For more products, visit our website:
<http://www.bristan.com>



Dimensions (measurements in mm)

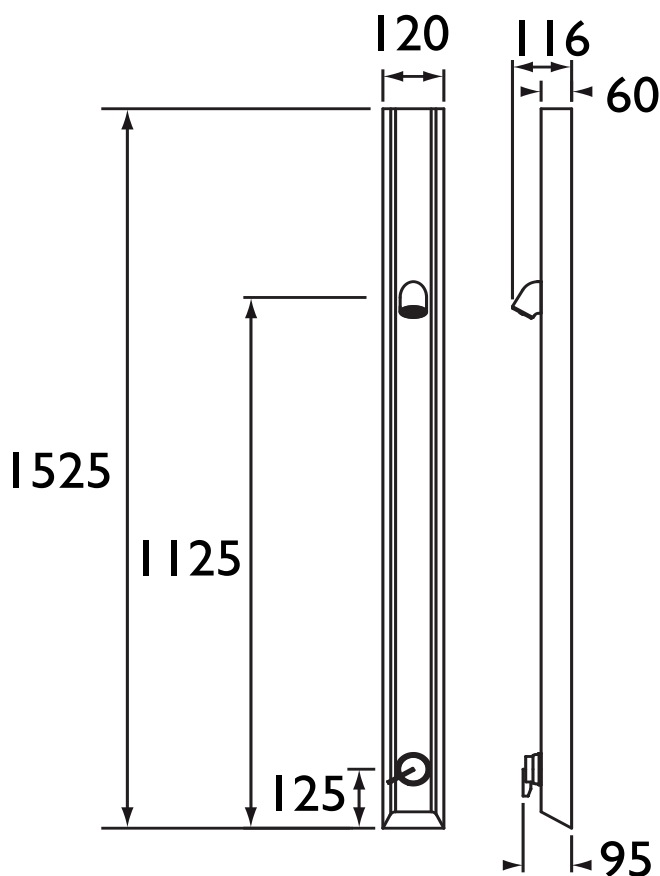

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)		6	8	8.2	8.4	8.5

TECHNICAL DATA SHEET



BRISTAN

TAPS & SHOWERS

D3