

**Serie | 2, Wall-mounted cooker hood,  
90 cm, Stainless steel  
DWP94BC50B**

**D**



**Optional accessories**

DHZ1224 : Chimney extension 500 mm  
DHZ1234 : Chimney extension 750 mm  
DHZ5275 : Recirculating kit  
DHZ5276 : Active carbon filter  
DHZ9550 : Brushed steel back panel  
DHZ9551 : Brushed steel back panel

**Pyramid hood: perfect performance  
matching your kitchen.**

- **Push buttons:** simply change the desired power level settings with mechanic control.
- An impressive extraction rate of 365 m<sup>3</sup>/h ensures this hood will have your kitchen odour free in no time.
- **Silent:** maximum extractor performance with little noise

**Technical Data**

|                                                        |                    |
|--------------------------------------------------------|--------------------|
| Color chimney :                                        | Stainless steel    |
| Typology :                                             | Chimney            |
| Approval certificates :                                | CE, VDE            |
| Length of electrical supply cord (cm) :                | 130                |
| Height of the chimney (mm) :                           | 553-730/573-730    |
| Height of product, without chimney (mm) :              | 246                |
| Minimum distance above an electric hob :               | 550                |
| Minimum distance above a gas hob :                     | 650                |
| Net weight (kg) :                                      | 10.439             |
| Type of control :                                      | mechanical         |
| Number of speed settings :                             | 3                  |
| Maximum output air extraction (m <sup>3</sup> /h) :    | 365                |
| Maximum output recirculating air (m <sup>3</sup> /h) : | 213                |
| Number of lights (Stck) :                              | 2                  |
| Noise level (dB(A) re 1 pW) :                          | 65                 |
| Diameter of air outlet (mm) :                          | 150 / 120          |
| Grease filter material :                               | Washable aluminium |
| EAN code :                                             | 4242005032020      |
| Connection rating (W) :                                | 100                |
| Current (A) :                                          | 10                 |
| Voltage (V) :                                          | 220-240            |
| Frequency (Hz) :                                       | 60; 50             |
| Plug type :                                            | GB plug            |
| Installation type :                                    | Wall-mounted       |



## Serie | 2, Wall-mounted cooker hood, 90 cm, Stainless steel DWP94BC50B

### Pyramid hood: perfect performance matching your kitchen.

#### Key performance features:

- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Max. extraction rate: 365 m<sup>3</sup>/h
- Noise max. Normal Level: 65 dB\*

#### Features

- Push button control
- 3 power levels
- 2 x 1.5W LED light
- Colour Temperature: 3500 K
- 3 removable metal grease filter cassettes
- Designed for wall mounted installation

#### Design

- Brushed steel
- Pyramid
- Chimney extractor hood
- Mechanical

#### Performance/technical information


- Ducted/Recirculating operation
- Recirculating kit
- Max. extraction rate: 365 m<sup>3</sup>/h
- Maximum extraction rate exhaust air 365 m<sup>3</sup>/h according to EN 61591
- Extraction rate in recirculation mode:  
Max. normal use: 213 m<sup>3</sup>/h
- Noise max. Normal Level: 65 dB\*
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 65 dB(A) re 1 pW (52 dB(A) re 20 µPa sound pressure)
- Noise level in recirculation mode:  
Max. normal use: 67 dB(A) re 1 pW (54 dB(A) re 20 µPa sound pressure)
- Power rating: 100 W
- Light Intensity: 94 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 799-975 x 900 x 500 mm
- Dimensions recirculating (HxWxD): 799-975 x 900 x 500 mm
- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Blower Efficiency Class: E\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: D\*
- Average Energy Consumption: 53.1 kWh/year\*

#### Optional accessories

- Recirculating kit

\* In accordance with the EU-Regulation No 65/2014


## Serie | 2, Wall-mounted cooker hood, 90 cm, Stainless steel DWP94BC50B

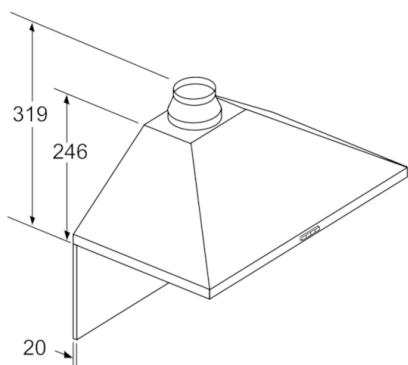


If a back panel is used,  
the design of the appliance  
must be considered.

measurements in mm

measurements in mm



- A: Socket
- B: Exhaust air:  $\geq 280$ ; circulated air:  $\geq 490$
- C: electric
- D: Gas, from upper edge of pan support

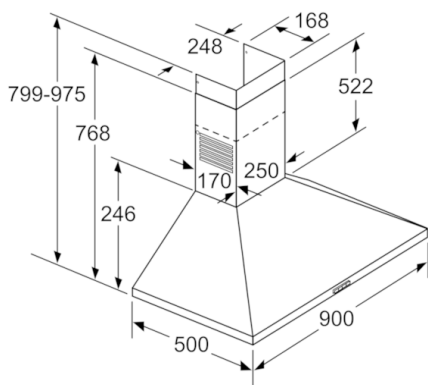

measurements in mm