

Serie | 4, Wall-mounted cooker hood,
60 cm, clear glass black printed
DWK67CM60B



Optional accessories

- DSZ5201 : CleanAir active carbon filter spare part
DWZ0AK0A0 : Active carbon filter (spare part)
DWZ0AK0R0 : Recirculation kit regenerative chimless
DWZ0AK0S0 : Recirculation kit regenerative
DWZ0AK0T0 : Recirculation kit for chimless use
DWZ0AK0U0 : Recirculation kit
DWZ0AX5K0 : Chimney extension 1000 mm
DWZ0AX5L0 : Chimney extension 1500 mm
DZZ0XX0P0 : CleanAir act.carbon filter regenerative

Angled hood: perfect for keeping an eye on
your pots and pans.

- **Especially silent:** maximum extractor performance with minimal noise
- An impressive extraction rate of 700 m³/h ensures this hood will have your kitchen odour free in no time.
- **TouchSelect control:** quick touch-control selection of desired settings and light.
- **Easy-to-clean interior:** hidden screws and cables along with rounded edges make cleaning easy.
- **Illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.

Technical Data

Color chimney :	Stainless steel
Typology :	Chimney
Approval certificates :	CE, VDE
Length of electrical supply cord (cm) :	130
Height of product, without chimney (mm) :	323
Minimum distance above an electric hob :	450
Minimum distance above a gas hob :	600
Net weight (kg) :	18.822
Type of control :	Electronic
Maximum output air extraction (m ³ /h) :	416
Boost position output recirculating (m ³ /h) :	557
Maximum output recirculating air (m ³ /h) :	388
Boost position air extraction (m ³ /h) :	700
Number of lights (Stck) :	2
Noise level (dB(A) re 1 pW) :	58
Diameter of air outlet (mm) :	150 / 120
Grease filter material :	Washable aluminium
EAN code :	4242005172740
Connection rating (W) :	263
Current (A) :	10
Voltage (V) :	220-240
Frequency (Hz) :	50; 60
Plug type :	GB plug
Installation type :	Wall-mounted



Serie | 4, Wall-mounted cooker hood, 60 cm, clear glass black printed DWK67CM60B

Angled hood: perfect for keeping an eye on your pots and pans.

Key performance features:

- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 416 m³/h
Intensive 700 m³/h
- Noise max. Normal Level: 58 dB*

Special features

- TouchControl with Electronic display
- 3 power levels & intensive setting
- 2 x 1.5W LED light
- Colour Temperature: 3500 K
- Automatic intensive revert (6mins)
- 2 removable metal grease filter cassettes
- easy to clean Inner frame
- Designed for wall mounted installation
- Rim ventilation

Design

- Black glass canopy
- angled glass design
- Chimney extractor hood
- TouchControl
- Electronic control

Performance/technical information



- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- In recirculation operation chimless use possible
- Easy installation system
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 416 m³/h
Intensive 700 m³/h
- Extraction rate according to EN 61591 max. 416 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 58 dB(A) re 1 pW (45 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
Max. normal use: 58 dB(A) re 1 pW (45 dB(A) re 20 µPa sound pressure)
Intensive: 67 dB(A) re 1 pW (54 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 58 dB (A) re 1pW
- Noise max. Normal Level: 58 dB*
- Power rating: 263 W
- Light Intensity: 100 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 928-1198 x 590 x 499 mm
- Dimensions recirculating (HxWxD): 988-1258 x 590 x 499 mm
- Dimensions recirculating with CleanAir module (HxWxD):
1118 x 590 x 499 mm - mounting with outer chimney
1188-1458 x 590 x 499 mm - mounting with telescopic chimney
- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Blower Efficiency Class: B*
- Lighting Efficiency Class: B*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 56.6 kWh/year*

Optional accessories

- Recirculating kit



* In accordance with the EU-Regulation No 65/2014

Serie | 4, Wall-mounted cooker hood, 60 cm, clear glass black printed DWK67CM60B

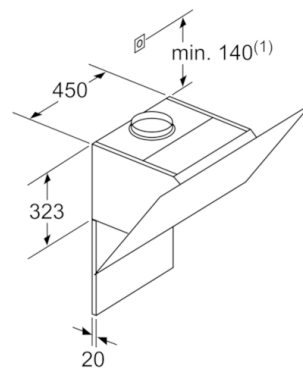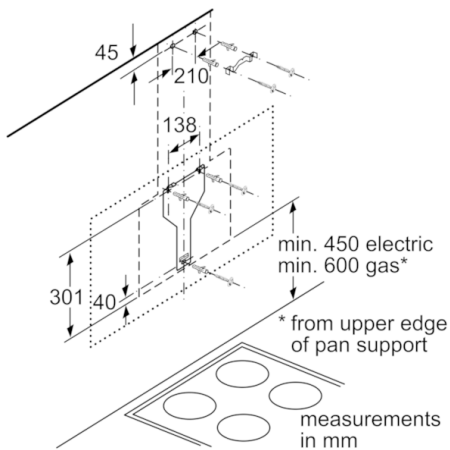


(1) Position of socket

Note the maximum thickness of the back panel.
measurements in mm

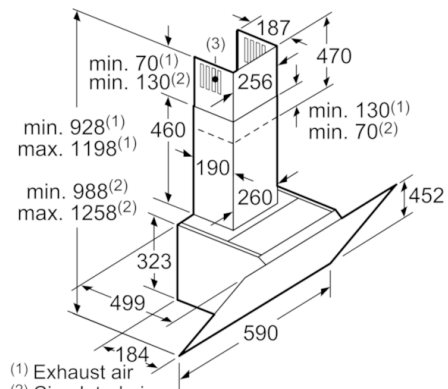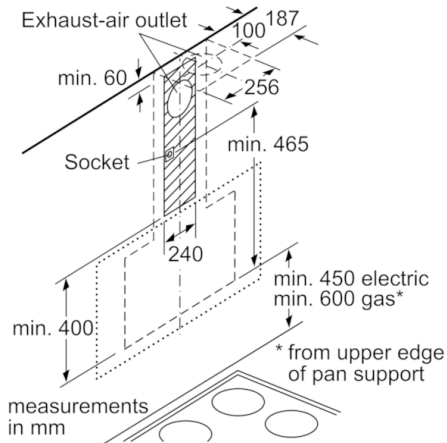


(1) Exhaust air
(2) Circulated air
(3) Air outlet – slot for exhaust air to be mounted facing down
measurements in mm

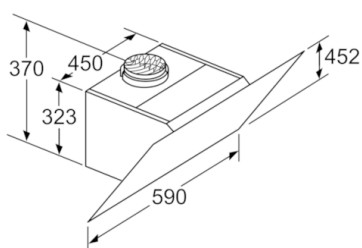

Appliance in circulated air mode
without duct
Circulated air set required

measurements in mm

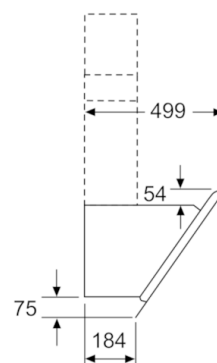

measurements in mm