

Serie | 8, Wall-mounted cooker hood,
90 cm, clear glass black printed
DWK98PR60B



A+



Optional accessories

- DSZ5201 : CleanAir active carbon filter spare part
- DWZ0AK0A0 : Active carbon filter (spare part)
- DWZ0AK0R0 : Recirculation kit regenerative chimless
- DWZ0AK0S0 : Recirculation kit regenerative
- DWZ0AK0T0 : Recirculation kit for chimless use
- DWZ0AK0U0 : Recirculation kit
- DWZ0AX5K0 : Chimney extension 1000 mm
- DWZ0AX5L0 : Chimney extension 1500 mm
- DZZ0XX0P0 : CleanAir act.carbon filter regenerative

Angled hood: perfect for keeping an eye on
your pots and pans.

- **DirectSelect control:** direct selection of desired settings and light.
- An impressive extraction rate of 837 m3/h ensures this hood will have your kitchen odour free in no time.
- **Home Connect:** Connected home appliances for an easier everyday life (only in countries where Home Connect service is available).
- **PerfectAir sensor:** automatic control of settings for maximum extractor performance with minimal noise.
- **Extra quiet:** maximum extractor performance with minimal noise.

Technical Data

Color chimney :	Stainless steel
Typology :	Chimney
Approval certificates :	CE, VDE
Length of electrical supply cord (cm) :	130
Height of product, without chimney (mm) :	323
Minimum distance above an electric hob :	450
Minimum distance above a gas hob :	600
Net weight (kg) :	18.403
Type of control :	Electronic
Number of speed settings :	3-stage + 2 intensive
Maximum output air extraction (m3/h) :	468
Boost position output recirculating (m3/h) :	583
Maximum output recirculating air (m3/h) :	430
Boost position air extraction (m³/h) :	837
Number of lights (Stck) :	2
Noise level (dB(A) re 1 pW) :	55
Diameter of air outlet (mm) :	150 / 120
Grease filter material :	Washable aluminium
EAN code :	4242002966748
Connection rating (W) :	166
Current (A) :	10
Voltage (V) :	220-240
Frequency (Hz) :	60; 50
Plug type :	GB plug
Installation type :	Wall-mounted



Serie | 8, Wall-mounted cooker hood, 90 cm, clear glass black printed DWK98PR60B

Angled hood: perfect for keeping an eye on your pots and pans.

Key performance features:

- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 467 m³/h
Intensive 837 m³/h
- Noise max. Normal Level: 55 dB*

Features

Home Connect: Remote Monitoring and Control (only in countries where Home Connect service is available)

- PerfectAir sensor
- Hob based hood control
- TouchControl with lightline
- 3 power levels and 2 intensive settings
- 2 x 3W LED light
- Colour Temperature: 3500 K
- Dimmer function
- Efficient BLDC-technology
- Automatic after running (10 min)
- Automatic intensive revert (6mins)
- 2 removable metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- Additional noise reduction insulation
- easy to clean Inner frame
- Designed for wall mounted installation
- Rim ventilation

Design

- Black glass canopy
- angled glass design
- Chimney extractor hood
- TouchControl
- Electronic control

Performance/technical information



- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Easy installation system
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 467 m³/h
Intensive 837 m³/h
- Extraction rate according to EN 61591 max. 467 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 55 dB(A) re 1 pW (42 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
Max. normal use: 55 dB(A) re 1 pW (42 dB(A) re 20 µPa sound pressure)
Intensive: 67 dB(A) re 1 pW (54 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 55 dB (A) re 1pW
- Noise max. Normal Level: 55 dB*
- Power rating: 166 W
- Light Intensity: 519 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 957-1227 x 894 x 548 mm
- Dimensions recirculating (HxWxD): 1017-1287 x 894 x 548 mm
- Dimensions recirculating with CleanAir module (HxWxD):
1147 x 894 x 548 mm - mounting with outer chimney
1217-1487 x 894 x 548 mm - mounting with telescopic chimney
- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A+++ to D)
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 31.5 kWh/year*

Optional accessories




- Recirculating kit

* In accordance with the EU-Regulation No 65/2014


Serie | 8, Wall-mounted cooker hood, 90 cm, clear glass black printed DWK98PR60B

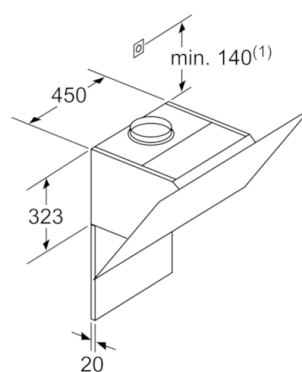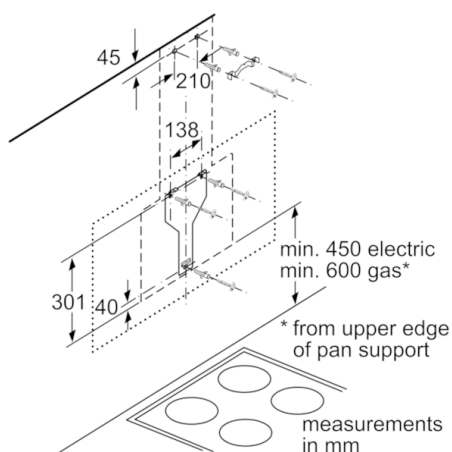

Note the maximum thickness of the back panel.
measurements in mm

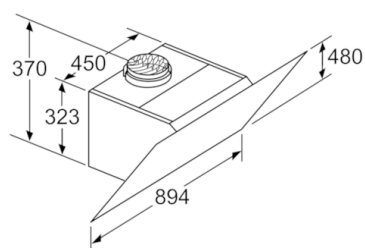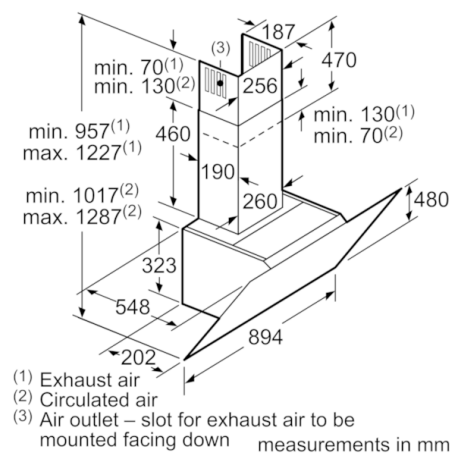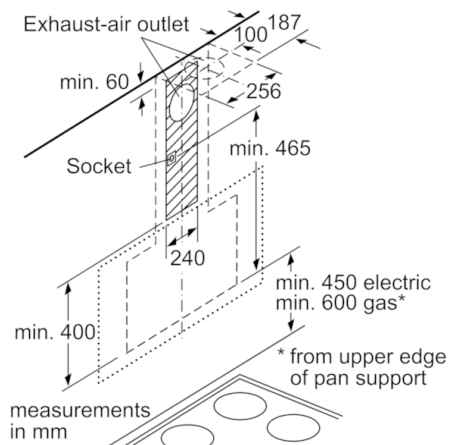

Appliance in circulated air mode
without duct
Circulated air set required
measurements in mm

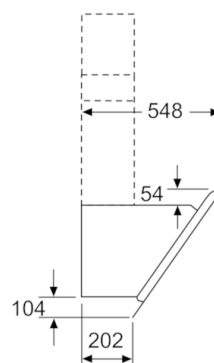

measurements in mm