

Serie | 4, Telescopic cooker hood, 60 cm, Silver metallic
DFS067A51B



Optional accessories

- DSZ4561 : Standard odor filter (replacement)
- DSZ4565 : Standard recirculation kit
- DSZ4660 : Lowering frame
- DWZ0IT0P0 :
- DWZ1IT1D1 : Long Life recirculation kit external
- DWZ1IX1B6 : Clean Air Plus odor filter (replacement)
- DWZ1IX1C6 : Clean Air Plus recirc. kit external

- Telescopic cooker hoods extend when in use and slide neatly away when not in operation.**
- **Extra quiet:** maximum extractor performance with minimal noise.
 - **Grease filtration level:** filters out over 85% of the grease from kitchen air.
 - **EcoSilence Drive:** our highly efficient motor saves on energy, not on performance.
 - **LED Illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.
 - **Intensive speed setting:** removes strong kitchen odours quickly and effectively.

Technical Data

Typology :	Pull-out
Approval certificates :	CE, VDE
Length of electrical supply cord (cm) :	175
Required niche size for installation (HxWxD) :	385mm x 524.0mm x 290mm
Minimum distance above an electric hob :	430
Minimum distance above a gas hob :	650
Net weight (kg) :	10.809
Type of control :	Electronic
Maximum output air extraction (m3/h) :	399
Boost position output recirculating (m3/h) :	628
Maximum output recirculating air (m3/h) :	358
Boost position air extraction (m³/h) :	728
Number of lights (Stck) :	2
Noise level (dB(A) re 1 pW) :	53
Diameter of air outlet (mm) :	120 / 150
Grease filter material :	Washable stainless steel
EAN code :	4242005232062
Connection rating (W) :	144
Fuse protection (A) :	10
Voltage (V) :	220-240
Frequency (Hz) :	50; 60
Plug type :	GB plug
Installation type :	Built-in



**Serie | 4, Telescopic cooker hood, 60 cm,
Silver metallic
DFS067A51B**

**Telescopic cooker hoods extend when in use
and slide neatly away when not in operation.**

Planning and installation information

- Installation system: Telescopic comfort installat.
- Installation: Cupboard 60 cm
- Dimensions (HxWxD): 426 x 598 x 290 mm
- Built-in dimensions (HxWxD): 385 x 524 x 290 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable length 1.75 m

** In accordance with the EU-Regulation No 65/2014*

Features

- Electronic control via Soft touch button control
- 3 power levels & intensive setting
- 2 x 1,5W LED
- Efficient BLDC technology
- Automatic intensive revert (6mins)
- Automatic after running (Automatic after running (10 min))
- 2 removable metal grease filter cassettes







Design

- 60 cm wide
- Silver metallic lacquer
- Handle strip specification: stainless steel with logo
- Steel filter cover

Performance

- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 max. 728 m³/h
- Extraction rate according to EN 61591 Ø 15 cm:
max. Normal use 399 m³/h
Intensive 728 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at
max. normal use exhaust air: 53 dB(A) re 1 pW
- Extraction rate exhaust air according to EN 61591:
max. normal use 399 m³/h, intensive 728 m³/h
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:
Extraction rate in recirculation mode:
Max. normal use: 358 m³/h
Intensive: 628 m³/h
Noise level in recirculation mode:
Max. normal use: 60 dB(A) re 1 pW
Intensive: 71 dB(A) re 1 pW
- 2 single inlet vertical, Efficient BLDC technology
- Colour Temperature: 3500 K
- Light Intensity: 294 lux
- Power rating: 144 W
- Average Energy Consumption: 37.9 kWh/year*
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*

**Serie | 4, Telescopic cooker hood, 60 cm,
Silver metallic
DFS067A51B**

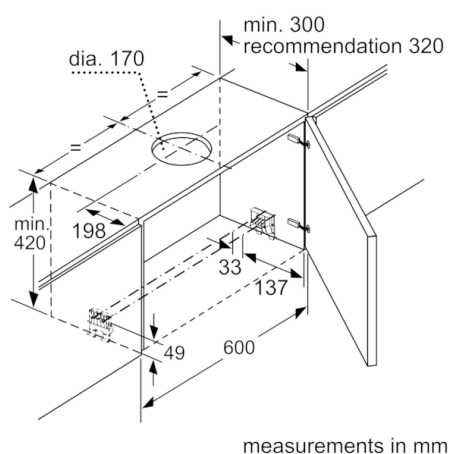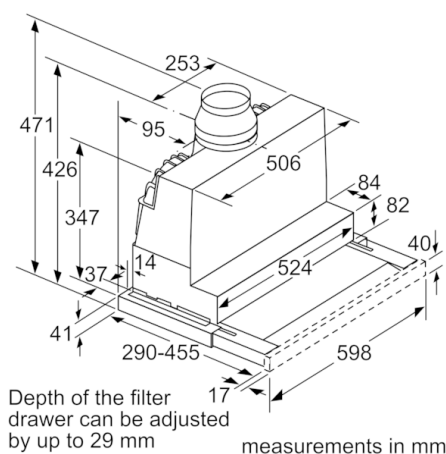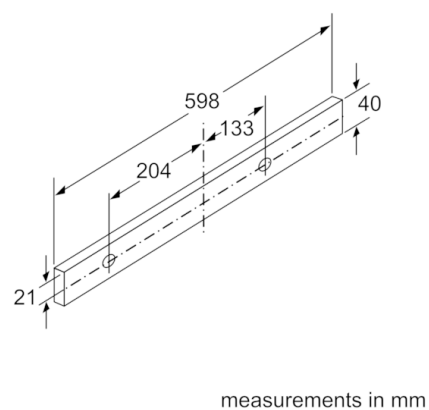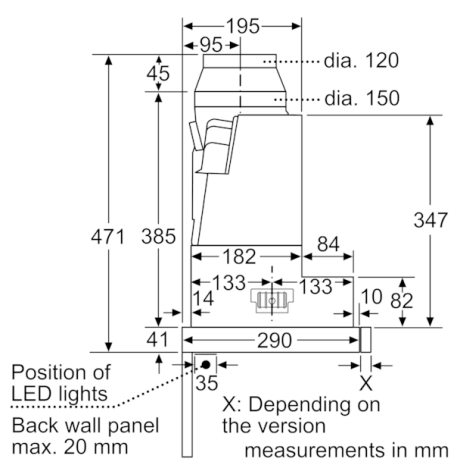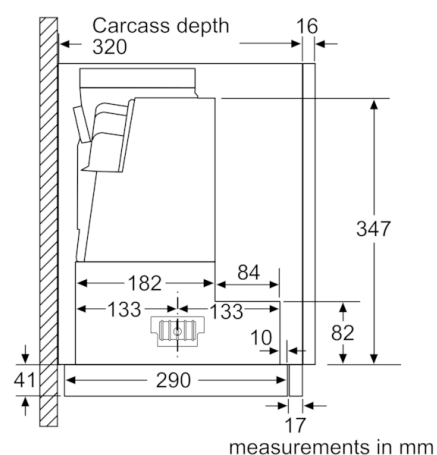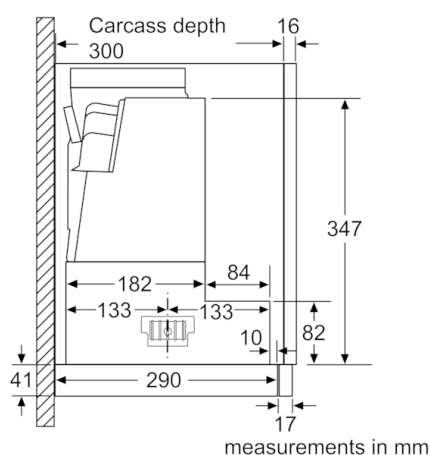

**Serie | 4, Telescopic cooker hood, 60 cm,
Silver metallic
DFS067A51B**

