


INSTALLATION GUIDE

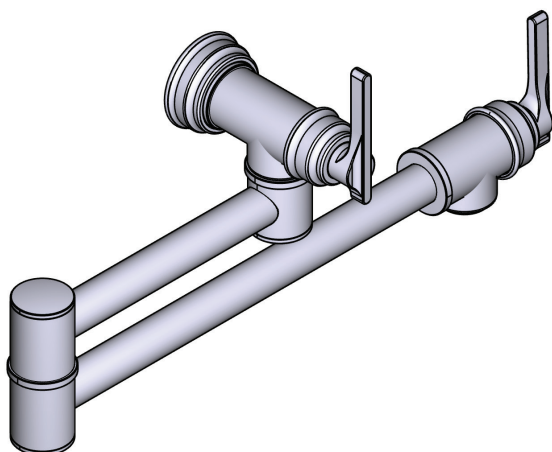

Southbank™ Pot Filler 4999

HELPFUL TOOLS

For safety and ease of installation, the use of these helpful tools is recommended.

 Safety Glasses	 3/32" drill bit	 Drill	 Pencil
 Tape Measure	 Thread Seal Tape	 Flathead Screwdriver	 Level
 Hex Wrench			

For care and cleaning, product warranty, and additional information contact:

US Customers

U.S.A.
houseofrohl.com/support
1-800-777-9762

Canadian Customers


QUEBEC / MARITIMES / WESTERN CANADA
QUÉBEC / MARITIMES / OUEST CANADIEN
QUEBEC / MARITIMOS / CANADA OCCIDENTAL
houseofrohl.ca/support
1-866-473-8442

EMEAA Customers

www.houseofrohl.design
+44 (0) 1708 526 361

Parts List

- A. Mounting Shank
- B. Wall Connector
- C. Grub Screws
- D. Wall Screws
- E. Rosette
- F. Grub Screws
- G. Tap Body

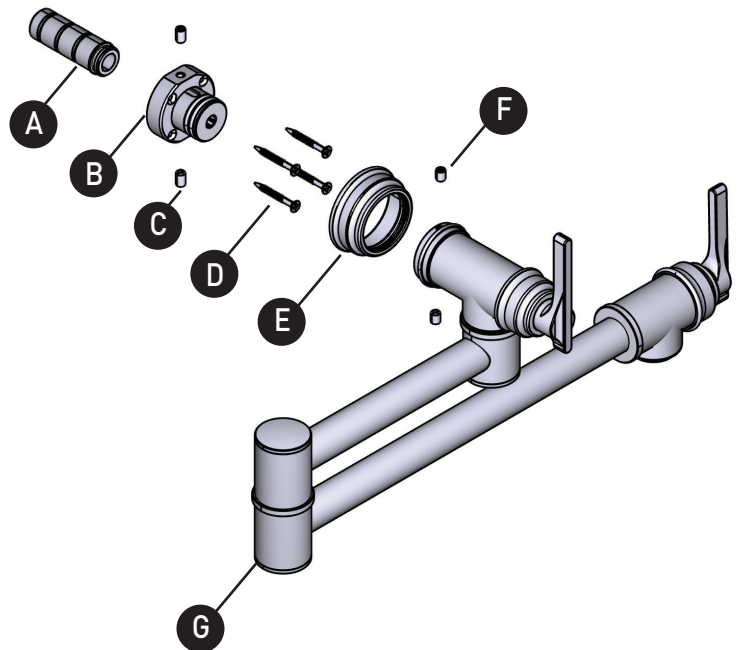

Icon Legend





Warning




CAUTION — TIPS FOR REMOVAL OF OLD TAP:


Always turn water supply OFF before removing existing tap or disassembling the valve. Open tap handle to relieve water pressure and ensure that complete water shut-off has been accomplished.

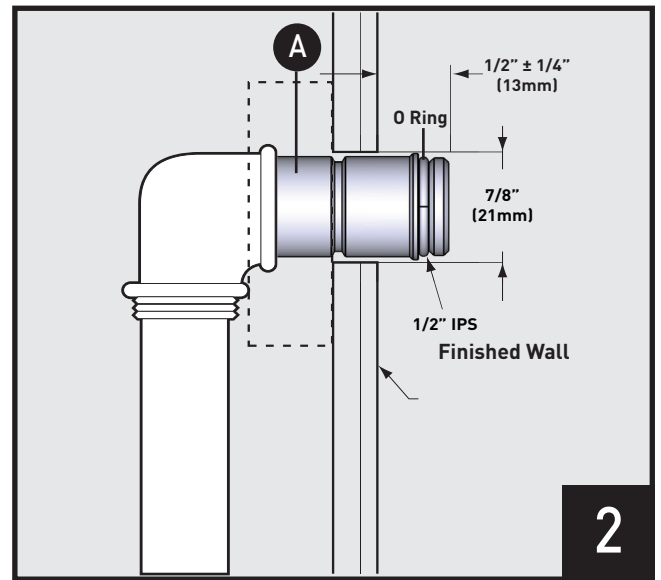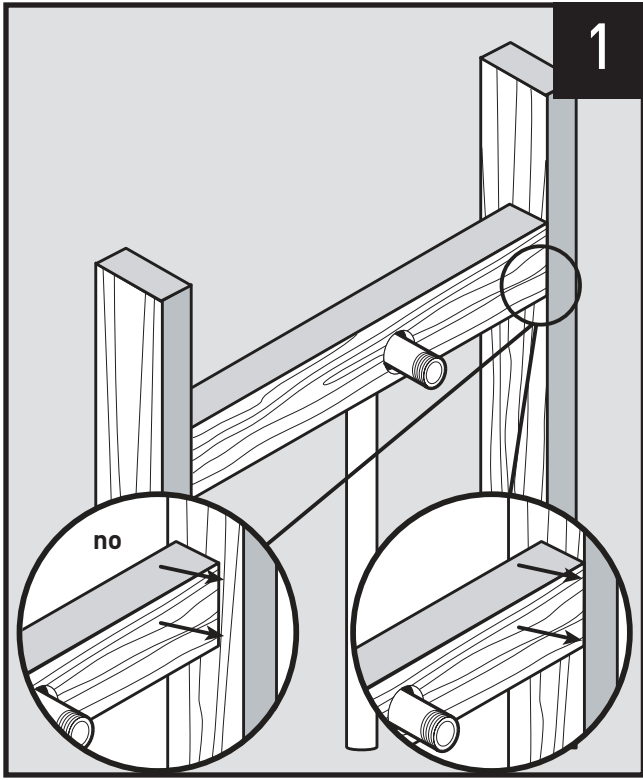


Position O Ring. Connect Mounting Shank **(A)** to water inlet.

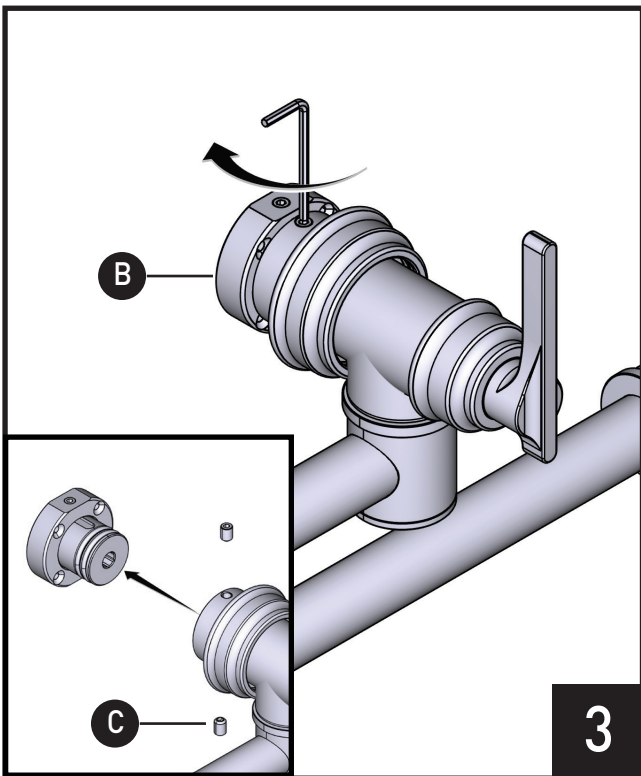


Remove Wall Connector **(B)** from pot filler assembly with 3mm hex key.

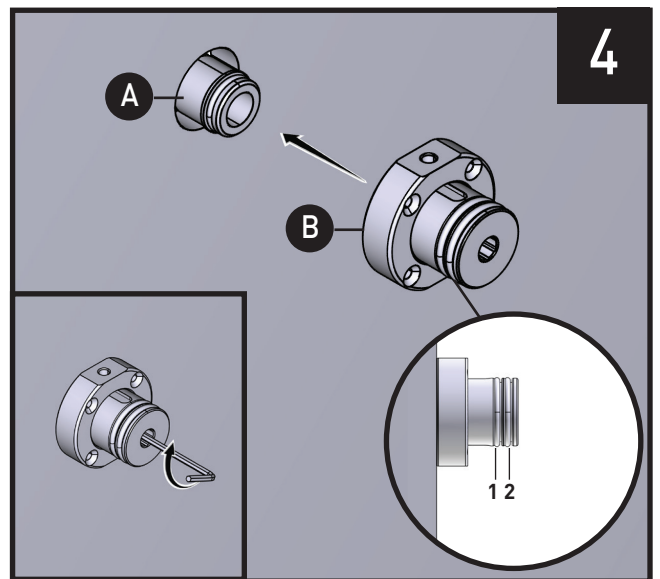


Screw Wall Connector **(B)** to Mounting Shank **(A)** with 8mm hex key. Ensure o-ring are fitted at positions 1 and 2.

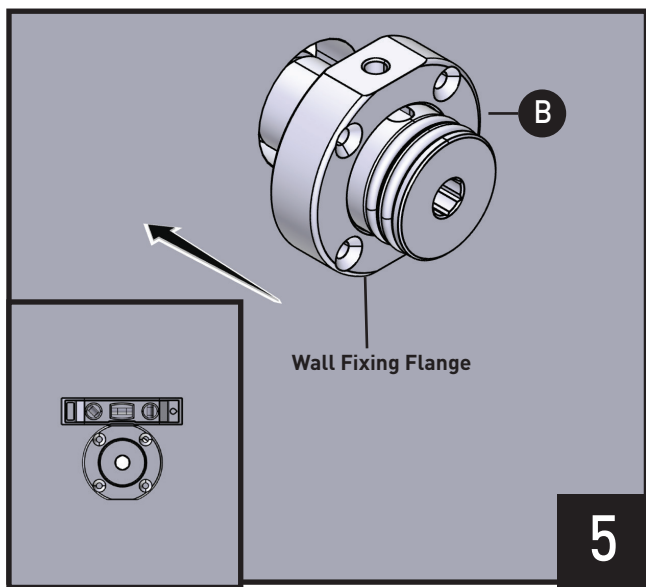


Adjust the depth of Wall Fixing Flange accordingly and level it.

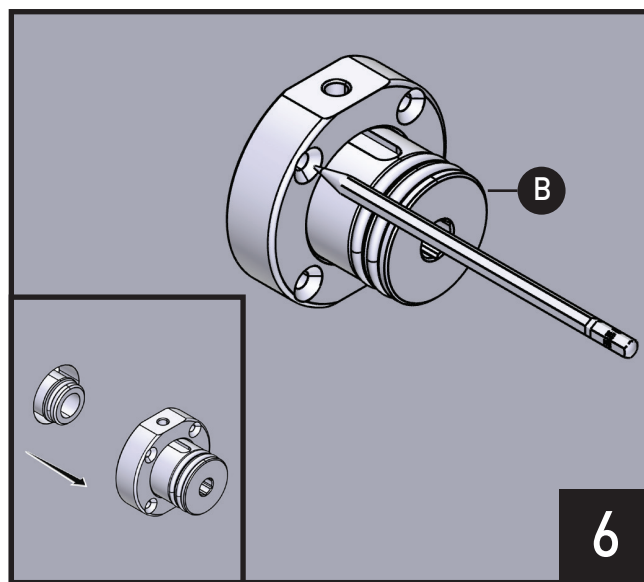


Mark the holes for drilling and remove Wall Connector **(B)**.

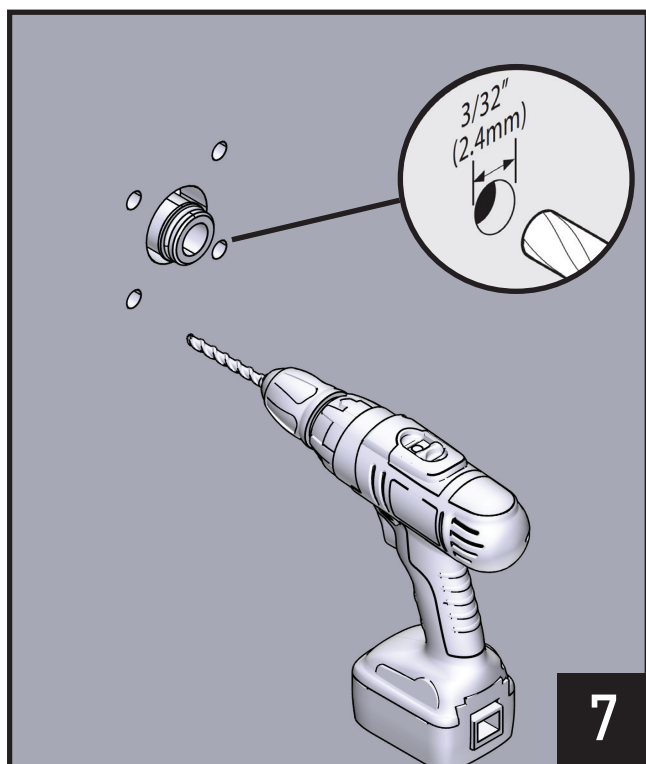


Drill the holes.

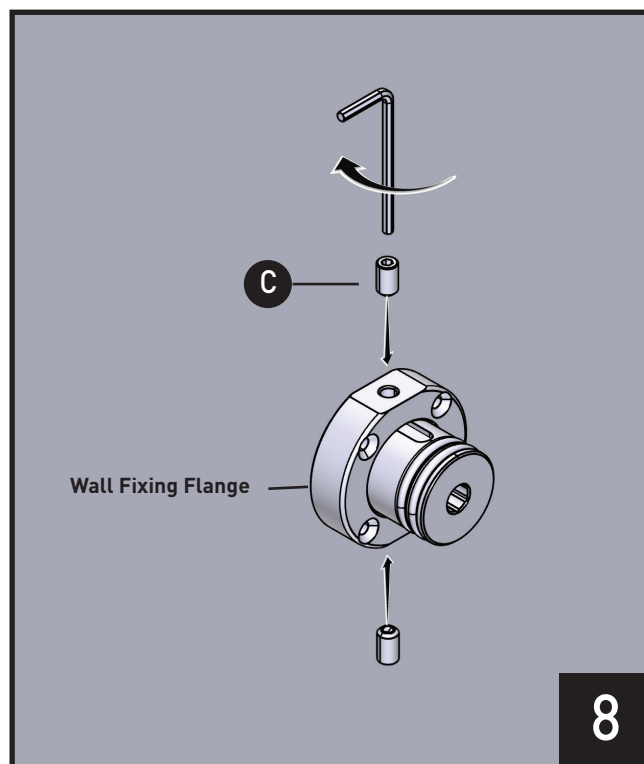


Repeat Steps 4-5. Then secure Wall Fixing Flange with Grub Screws **(C)**.

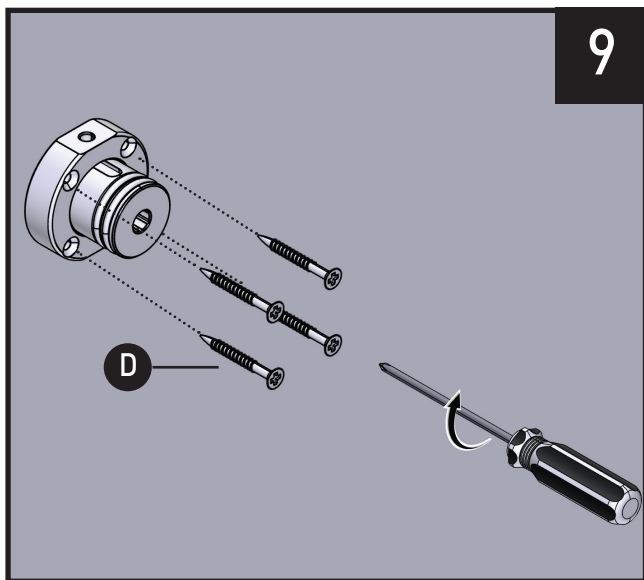


Secure Wall Fixing Flange to wall with Wall Screws **(D)**.

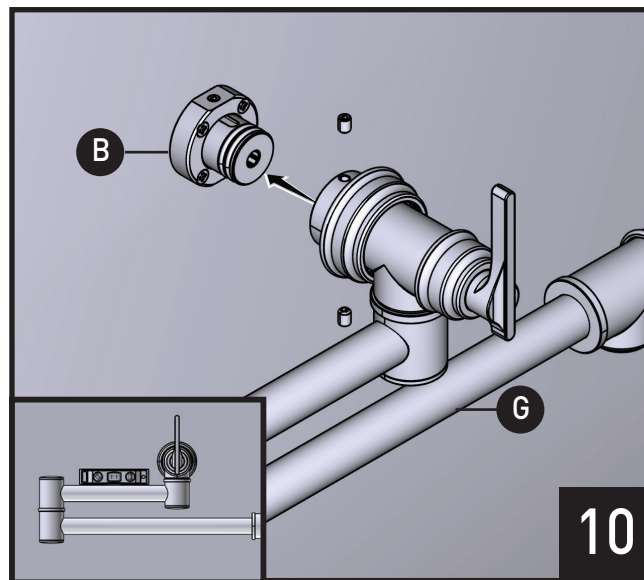





Install Tap Body **(G)** onto Wall Connector **(B)** and level it.

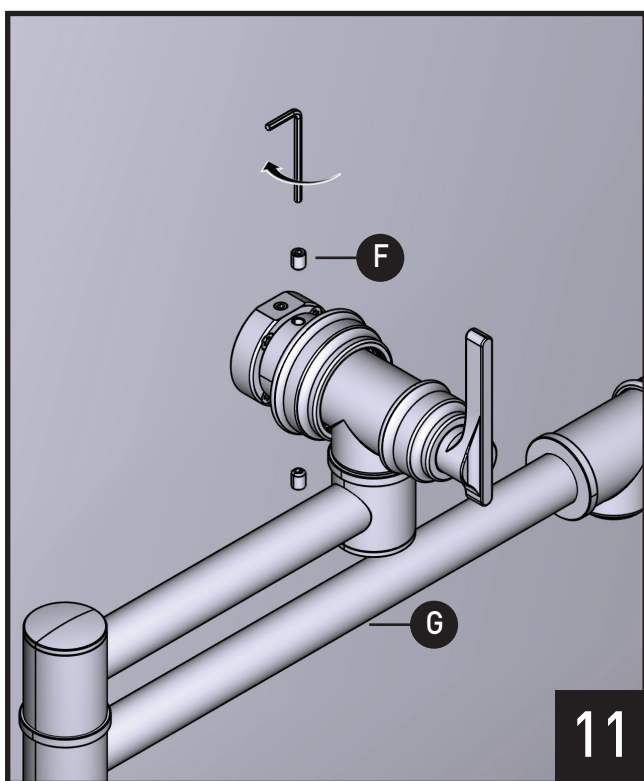

Secure Tap Body **(G)** with Grub Screws **(F)** using 2.5mm hex key.

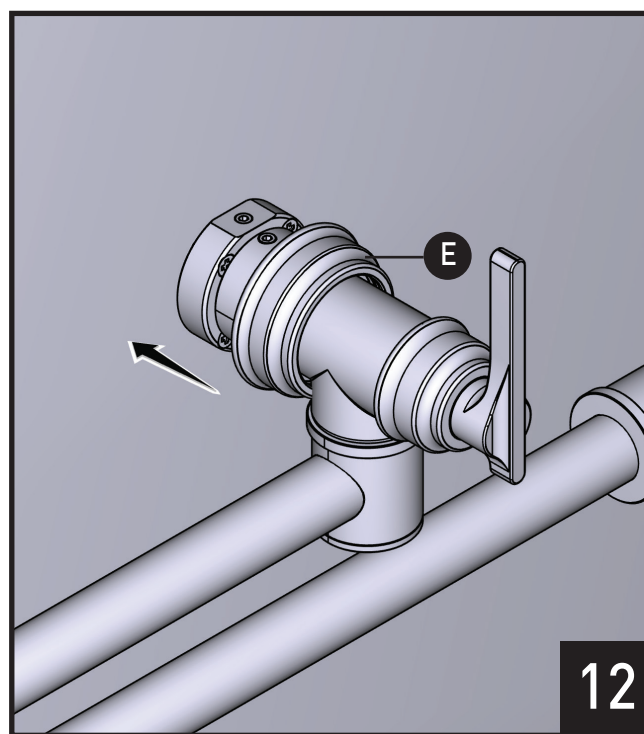

Slide Rosette **(E)** over the concealed fixing screws until it is flush with mounting surface.

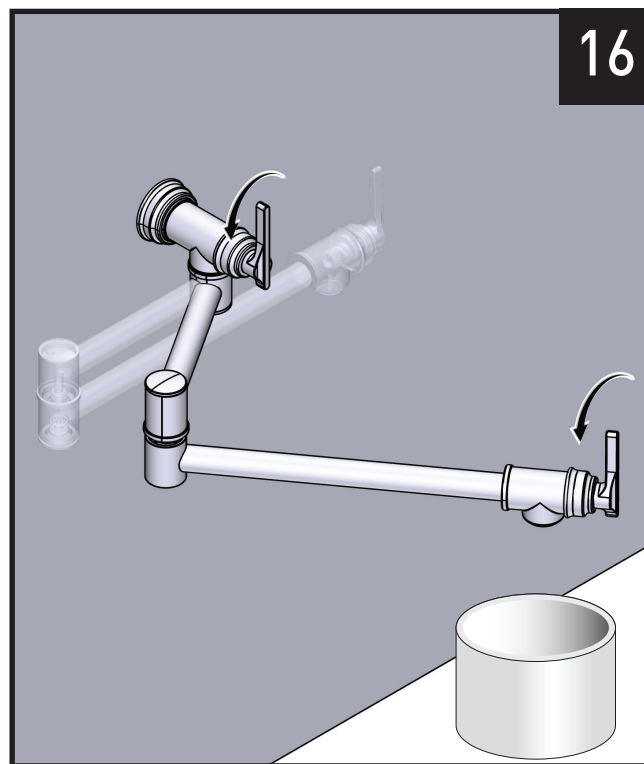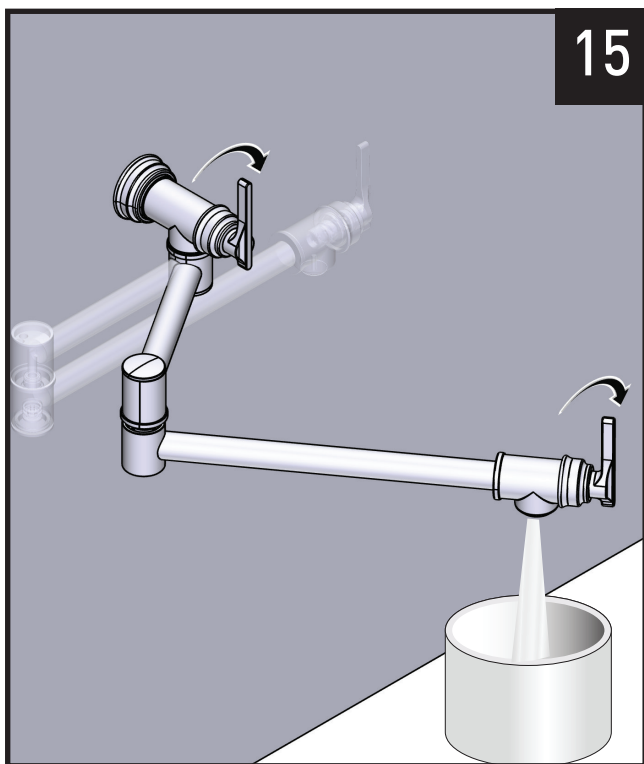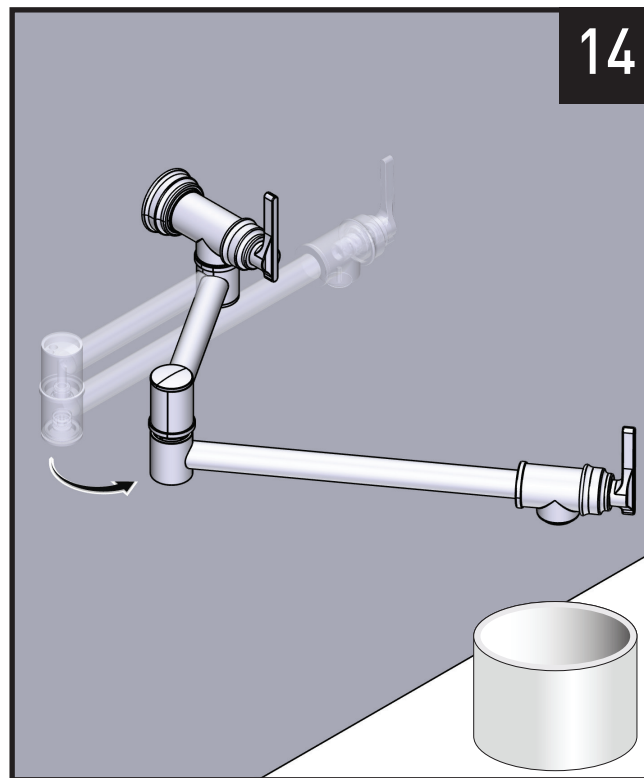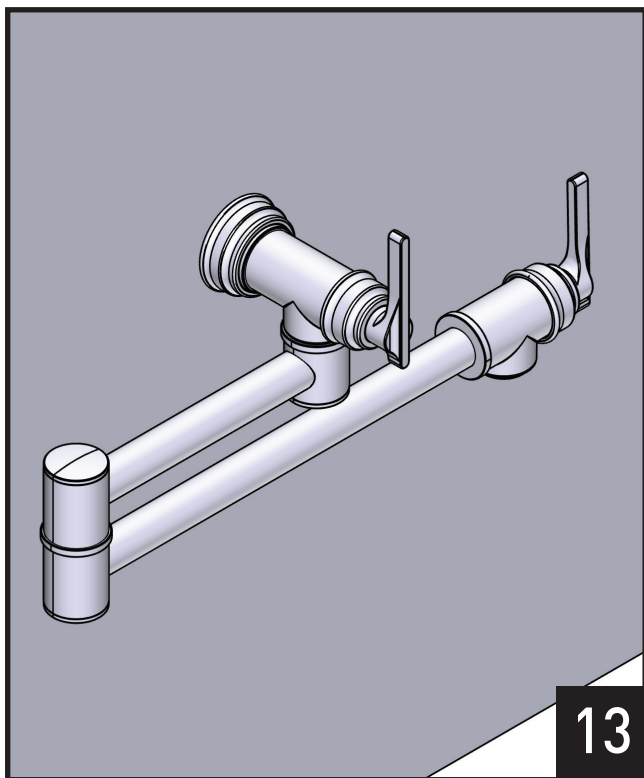

Care and maintenance:

Wipe down after use to avoid water spotting and mineral build up. Occasional cleaning with warm soapy water, followed by a polish with a soft cloth is all that is required to keep the plated finish in good condition.

Do not use proprietary abrasive liquids, powders, or pads to clean your Kitchen Tap. Do not use any products with ammonia bleach or limescale remover. You will damage the plated finish and void your guarantee.

For care and cleaning, product warranty, and additional information contact:

US Customers

U.S.A.
houseofrohl.com/support
1-800-777-9762

Canadian Customers

QUEBEC / MARITIMES / WESTERN CANADA
QUÉBEC / MARITIMES / OUEST CANADIEN
QUEBEC / MARITIMOS / CANADA OCCIDENTAL
houseofrohl.ca/support
1-866-473-8442

EMEAA Customers

www.houseofrohl.design
+44 (0) 1708 526 361

Riobel

PERRIN & ROWE®
L O N D O N



victoria ⊕ albert®

ROHL