

Product Finish: **Antique Brass**

Product code: **AT2228**
 EAN13 barcode: **5060879994522**



Product features:

- Victorian inspired aesthetic
- Quarter turn handle action for precise flow control
- Ceramic handle(s) as standard
- Flow Limited to 5 Litres per Minute for Part G compliance
- Supplied complete with flexible tail pipes for fast simple fitting

Additional information / Parts included:

Includes additional Honeycomb 1.5gpm, Solid metal handle addition

Note: the image shown may not reflect the product finish, chrome finish is typically depicted.


Product dimensions:

- **Overall, Height / projection:** 326 mm
- **Exit reach:** 223 mm
- **Exit height:** 178 mm
- **Centre distance(s):**
- **Base diameter(s):** 48 x 50mm
- **Recommended hole diameter:** Ø 35 mm
- **Max. surface depth:** 40 mm


- **Spout diameter:** 20 mm
- **Spout aerator size:** M22 x 1

Packaged properties:

- Box length:** 575mm
- Box depth:** 80mm
- Box width:** 350mm
- Units per outer:** 5
- Tap only weight:** 2.13kg
- Boxed weight:** 3.39kg

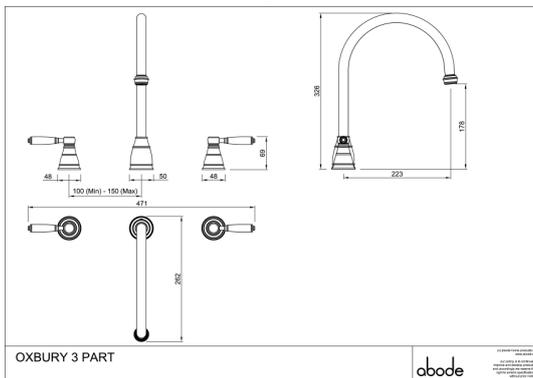

Product flow characteristics:

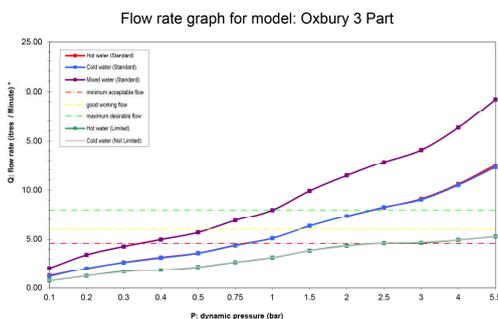

- **Min / Max water pressure:** 0.40 / 5 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 14.10

- **Control valve type:** Ceramic disc QT
- **Product flow characteristics:** Single flow
- **Non return valve(s):** None

- **Aerator type:** Honeycomb Aerator
- **Accepts revolve / spray areator:** No
- **Spout connection method:** Grub screw

- **Tail pipe inlet / outlet size:** M10 / M8 / 1/2" Female / M8
- **Inlet pipe type / length:** Flexible stainless braided hose / 365 / 400 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year