

Scandi Grey

abode

	<table> <tr> <td>Product code</td><td>PT3017</td></tr> <tr> <td>EAN 13 barcode</td><td>5060879998623</td></tr> <tr> <td>Specification version</td><td>022 22/01/2022</td></tr> <tr> <td>Finish</td><td>Scandi Grey</td></tr> <tr> <td>Notes:</td><td></td></tr> </table>	Product code	PT3017	EAN 13 barcode	5060879998623	Specification version	022 22/01/2022	Finish	Scandi Grey	Notes:	
Product code	PT3017										
EAN 13 barcode	5060879998623										
Specification version	022 22/01/2022										
Finish	Scandi Grey										
Notes:											
note: model shown may not be displayed in the finish as described											

	Scandi-X Boiling Water & Filter Tap	abode	(c) abode home products for www.abode.co.uk Our policy is to continually improve all product details. All accordingly we reserve the right to amend specifications without prior notice	Overall Product Length (mm) (typically left to right dimension of product)	170
				Overall Product Width (mm) (typically the rear of the base plinth to the end of the spout)	257
				Overall Product Height (mm) (typically from base of tap to top of spout)	388
				Spout Exit Height (mm) (typically from the base of the tap to the underside of the aerator)	273
				Spout Exit Height (Maximum mm) (typically from the base of the tap to the underside of the aerator, only applicable to taps with moving spouts)	273
				Spout Exit Reach (mm) (typically from the centreline of the tap hole to the centre of the aerator)	220
				Spout Exit Reach (At Maximum mm) (typically from the centreline of the tap hole to the centre of the aerator, only applicable to taps with moving spouts)	220
				Base Diameter (mm) (typically the diameter of the base plinth or the size of the wall plate)	48
				Handle Back Projection (mm) (typically the distance from the centre of the taphole to the furthest point backwards of the lever when rotated)	48
				Tap Hole or Mounting Holes Size (mm) (min. & max. mounting hole size)	35mm diameter
				Tap Hole Centre Spacing (mm) (recommended distance between tap holes)	170
				Fixing range (mm) (min - max surface fixing depth)	0 - 50
				Recommended Hole size (wall mounted products only)	48

- Packaging Type: Boxed
- Packaged size LxWxD: 580x370x450
- Gross weight (ea): 9.195Kg

Details of Warranty duration and Terms & Conditions for each product type can be found on our website:
abodedesigns.co.uk/support/warranty


Certain products may benefit by registering the Warranty here:
abodedesigns.co.uk/support/register/warranty

- Clean the mixer regularly as required, using a mild soap, do not use any other cleaners.
- After cleaning rinse thoroughly with clean water to remove any cleaner residue.
- Avoid contact with any harsh chemical or abrasives, for more detail see supplied booklet or www.abodedesigns.co.uk
- Regular tank cleaning & filter replacement will prevent the build-up of lime scale and dirt.

Features:

Delivers filtered water?	Delivers filtered 98°C water?	Has a spray function?	Has a Pull around (semi pro) function?	Product is flow limited?	Product is DDA compliant?
Yes	Yes	x	x	Yes	Yes

Flow characteristics:

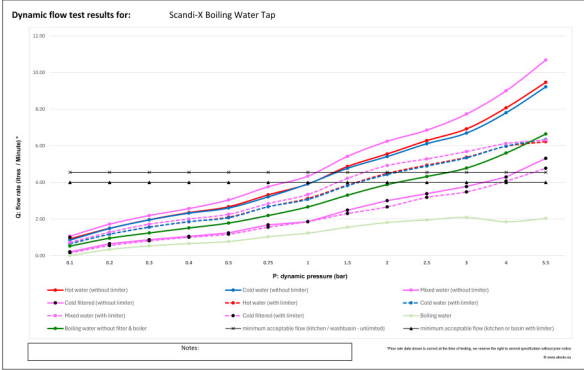	Min. cold water pressure (bar)	1.5
	Min. hot water pressure (bar)	1.5
	Max. water pressure (bar)	5.5
	Max. flow at 3 bar (l/m)	5.68
	General notes on pressures / flow: 2.0 bar hot & cold pressure required if optional flow limiter is installed	

Flow Limiter:

Max. Design Flow limit	Flow limiter (USG/LPM)	Flow limiter Location
5.68	L/M	supplied bagged & separately (customer option to install in base of spout)

Spout:

Flow characteristics	Spout Rotation Range (°)	Spout End Connection (spout end threading)
dual flow (98°C water in centre channel, all other sources share outer tube)	180	m22 male

Connections:

Function	Type	Inlet connection	Outlet connection	Overall Length	Check valve included?	Other information
Hot Water Inlet	Flexible Stainless Braided Hose	1/2" BSP Female	M8	450		1/2"F supplied with captive rubber seal
Cold Water Inlet	Flexible Stainless Braided Hose	1/2" BSP Female	M8	450		1/2"F supplied with captive rubber seal


Filtration:

Filter Type	Filter media	Filter reorder code
Abode Hard Water Optimisation	Dealk Ion exchange & Granular Activated Carbon	PT1206



Filter features:

- Included with every PB3X system
- Filtered drinking water, designed specifically to suit boiling water applications
- Recommended replacement interval 6 months (depending upon use and water quality)
- Chlorine taste, sediment and odour reduction
- Scale reduction for better drinks and tank protection
- Easy replacement filter fittings

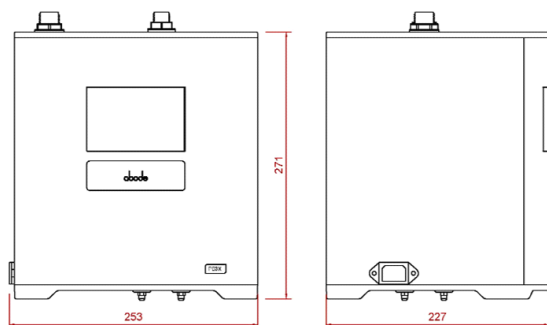

Boiler features:

- Digital adjustable tank temperature range 75, 85, 90-98°C
- Touch screen control
- 3 Litre capacity tank, ~11 minutes reboil after (3L) use
- High grade 316 stainless steel tank
- On screen adjustable filter life & descale indicators
- Energy saving tank insulation and power saving modes
- Intelligent self-diagnostic control
- No external drain connection needed for a simplified, compact and more flexible installation
- Flow limited to 2 litres/min to limit splashing and ensure a smooth flow
- Tool free, hand tighten connectors to speed up installation, maintenance and descaling
- Compact size 253x227x271cm fits under apron front sinks



The complete package:

- Every system includes, PB3X boiler, hard water filter and a choice of stylish boiling water taps.
- Comprehensive installation and user guides
- UK Based customer service, with installation, maintenance and service support
- Filter reminder service, care packages and subscription savings available