



Fitting type: Inset

Sink handing: Reversible

Finish style: Unbrushed / Satin

- **Min. base unit (bowl, tap & overflow only):** 450 mm
- **Packaged size L x W x D:** 915 x 560 x 210mm
- **Supplied boxed or sleeved:** Boxed
- **Boxed weight:** 6.14 kg
- **Sink only weight:** 3.90 kg

- Durable 18/10 stainless steel construction throughout
- Reversible drainer position for maximum flexibility
- Compact sink designed to complement smaller kitchens
- Smooth lined luxury Orbit waste supplied as standard
- Prefitted worktop seal
- Taphole provision to accept Switch filter diverter? Yes, on sink deck

Included parts:



1 x AX1001 (m)
90mm (1.5") Orbit manual basket
strainer waste - short bolt



1 x AX1006 (m)
Rectangular overflow pipework



1 x AX1008 (m)
1.0 Bowl pipework



1 x AX1014 (m)
35mm tap hole cover plate - brushed
steel



1 x AX1054 (m)
Inset stainless steel fixing clips x 8




1 x AX4016 (m)
Fitting & care instructions & data
sheet - st/st inset



1 x AX1057 (m)
factory fitted rim worktop seal

Recommended accessories:



1 x AX1011
Tap stabilising bracket



1 x AX2502 or AX2503
High & Dry drainer rack - Lime green
and grey



1 x AX3011
Bowl mat 274 x 334 R5

All accessories can be
purchased directly from
www.abode-shop.co.uk
or phone 01226 283434

Materials and workmanship warranty summary:

- Sink materials & workmanship 10 years.
- Waste kits 1 year.
- Connecting pipework 1 year.

Care instructions:

- Clean the products regularly using soapy water and a non abrasive cloth, regular cleaning will prevent the build up of lime scale and dirt.
- Avoid contact with corrosive or abrasive substances.
- After cleaning rinse thoroughly with clean water then dry.
- For more detail see supplied booklet or www.abode.eu




EN13310:2003
Domestic kitchen sink made of Stainless steel

Cleanability: Pass
Load resistance: NPD / NA
(applies to wall hung sinks only)
Durability: Pass
For more information see www.abode.eu/ce.html


Product dimensions and installation information:



symbol indicates position of acoustic pad on stainless products.

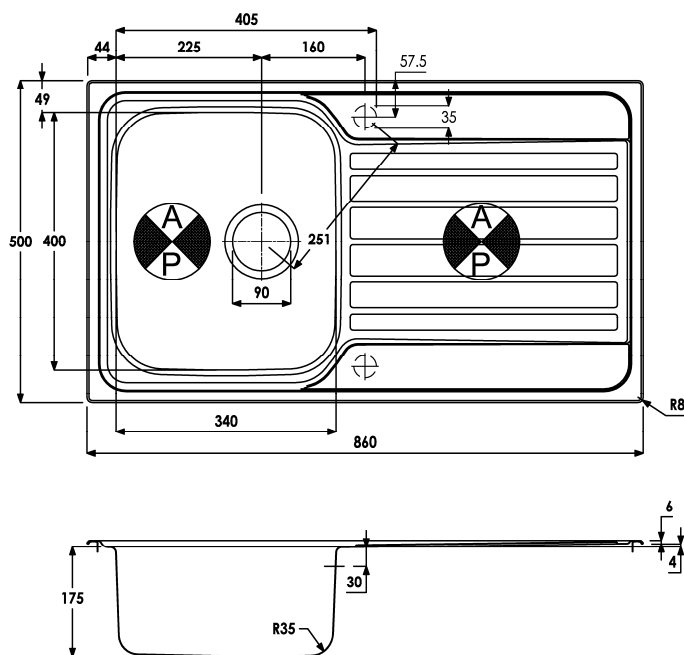

INSET CUT OUT

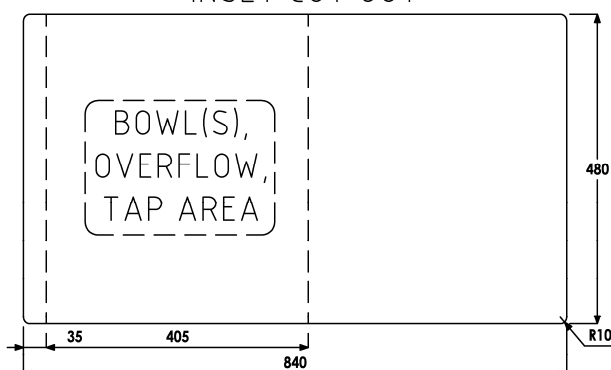

Overall product size: 860 x 500 x 190 corner radius 8mm

Taphole(s) detail: 2 x Ø 35mm, pre-cut

Compatibility with large square taps: Please check compatibility of some large square base design taps with this sink

Wastehole(s) detail (mm): 90 / N/A / N/A (nb. 90mm wastes accept a waste disposal unit)

Min. base unit (refers to space required for bowl, tap and overflow only): fits 450mm carcass

Min. Recessed fitting width: required (bowl(s), tap and overflow: 405mm

***Worktop cut out size:** 840x480 corner radius 10mm, for .DXF cut files please see www.abode.eu

Min. & Max worktop depth or clip depth reach range: 21 - 40mm


Fitting template supplied? No, use cut out instructions as supplied

Dishwasher under drainer? Distance from top of worktop to underside of the drainer 4mm



*Important, fabricator / installer notes for undermount & flushmount sinks:

The cut out size indicated is aligned with outside edge of the bowl top radius (see example below).



You should confirm with your client if the worksurface cutout is to be cut flush, inside or outside this suggested perimeter shape & size.

If you create the cutout smaller or larger than the indicated size then the fit of the accessories may be affected and should be physically checked.

General:

All details are provided in good faith but do not include the tolerances of the material or manufacturing process.

We request that a test cutout is made in scrap timber and checked against the actual sink to be installed before committing to cutting the final worksurface.

Abode can not accept liability for problems or costs incurred by failure to follow this request.

Note: the dimensions on ceramic fireclay products are subject to wider tolerances due to the nature of this natural material and the firing process.

CAD cutout files can be downloaded from www.abode.eu

Bowl details: (sizes in mm unless specified otherwise)

Bowl 1 (typically main bowl):

Bowl 1 size L x W x D (mm): 340 x 400 x 175

Bowl 1 construction: Pressed, 0.80mm

Bowl 1 floor radius (mm): 35

Bowl 1 Wastehole diameter (mm): 90

Bowl 1 overflow: Slotted, std equal pattern

Bowl 1 texture: Unbrushed / satin

Bowl 1 apx. volume (litres): 16.00

Bowl 2 (typically ½ or ¾ bowl):

Bowl 2 size L x W x D (mm): N/A x N/A x N/A

Bowl 2 construction: N/A, N/Amm

Bowl 2 floor radius (mm): N/A

Bowl 2 Wastehole diameter (mm): N/A

Bowl 2 overflow: N/A

Bowl 2 texture: N/A

Bowl 2 apx. volume (litres): N/A

Bowl 3:

Bowl 3 size L x W x D (mm): N/A x N/A x N/A

Bowl 3 construction: N/A, N/Amm

Bowl 3 floor radius (mm): N/A

Bowl 3 Wastehole diameter (mm): N/A

Bowl 3 overflow: N/A

Bowl 3 texture: N/A

Bowl 3 apx. volume (litres): N/A

Important: Please retain this sheet for future use